

EDITION 05

# GLASS & GLAZING

## HIGH PERFORMANCE ADHESIVE TAPES



**UK INDUSTRIAL TAPES<sup>LTD</sup>**

[www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk)

# WELCOME

UK Industrial Tapes Ltd are a leading Manufacturer, Converter and Supplier of high-performance Adhesive Tapes and Adhesive products.

With over 25 years' experience, we have become a major supplier of high-performance tapes and packaging products into Glass and Glazing market.

Priding ourselves on high product quality combined with excellent customer service to offer a reliable, consistent and innovative supply. With our vast range of high-performance tapes and packaging products we strive to offer the ultimate solution for all your application requirements.



## ACCREDITATIONS



INVESTORS  
IN PEOPLE



## FOLLOW US ON SOCIAL MEDIA



[www.stix2.co.uk](http://www.stix2.co.uk)



[www.postapes.co.uk](http://www.postapes.co.uk)

Stix2 & POS Tapes are trading  
divisions of UK Industrial Tapes Ltd



## CONTENTS

GEORGIAN BAR TAPE	4	HIGH PERFORMANCE BONDING TAPES	31
GLAZING TAPE	9	FLASHING TAPE	33
SECURITY GLAZING	11	PACKAGING AND APPLICATION PRODUCTS	35
TRIM TAPE	13	HOW TO ORDER	44
SINGLE SIDED FOAM TAPE	15	LEGAL INFORMATION	45
CERAMIC GLAZING TAPE	19		
UPVC DOOR PANEL BONDING TAPE	21		
COMPOSITE DOOR CASSETTE BONDING TAPE	23		
COMPOSITE DOOR SLAB TAPE	26		
LOW TACK PROTECTION TAPE	27		
SMART SYSTEMS APPROVED TAPES	29		



The main two core values which run through UK Industrial Tapes are 'The Customer' and 'Continual Quality'.



## GEORGIAN BAR TAPE

01



# Georgian Bar Tape

We offer a range of high performance double sided tapes for the Georgian (astragal) bar application.

Our **FoamLINK 1103, 33 Range and 122 Range** tapes which we recommend for the Georgian Bar Application have excellent UV resistance (use indoor & outdoor) and tremendous Peel & Shear strength which is critical factor for this demanding application to ensure the bars stay in situ.

Our tapes are tested and industry approved for bonding bar system materials, such as aluminium, upvc and wooded Georgian Bars to glass and and have been used for over 25 years.

### Georgian Bar Tapes we offer:

**FoamLINK 1103H+** – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

**FoamLINK 1603H+** – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

**331** – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

**3316** – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper or filmic release liner

**1222** – High Performance, 1mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

**1223**- High Performance, 1.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

**1224** - High Performance, 2mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

**1226**– High Performance, 1.1mm thick, Foamed Acrylic, in White with a red filmic release liner.

**1228**– High Performance, 1mm thick, Foamed Acrylic, in Black with a red filmic release liner.

Our range of Georgian Bar Tapes are approved on the below Bar Systems by our customers, contact our Sales Account Executives who can specify the correct tape for your bar system;

**Rehau, Deceuninck, Geo Fast, Smart System, R9**

### Benefits of using Georgian Bar Tapes:

- Buy direct from the manufacture and converter
- Can offer bespoke tape widths to suit the bar system
- Range of thickness and colours
- Fantastic high initial tacks
- Excellent resistance to stress and vibration.
- Resists UV exposure for internal and external use




# GEORGIAN BAR TAPE

## FoamLINK 1103H+ / FoamLINK 1603H+


Permanent indoor  
and outdoor use.  
Modified acrylic  
adhesive system.

### FoamLINK 1103H+ (white + black)

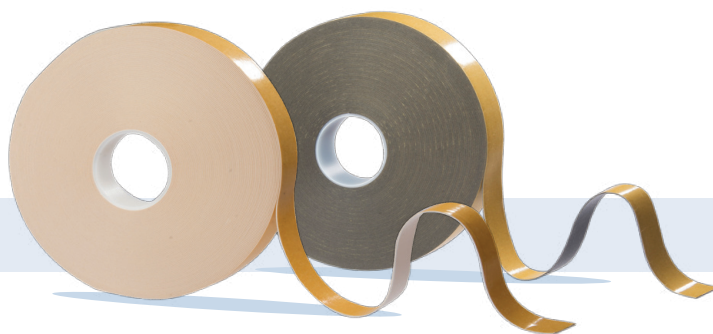

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1103	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm	50m	White and Black

### FoamLINK 1603H+ (white + black)

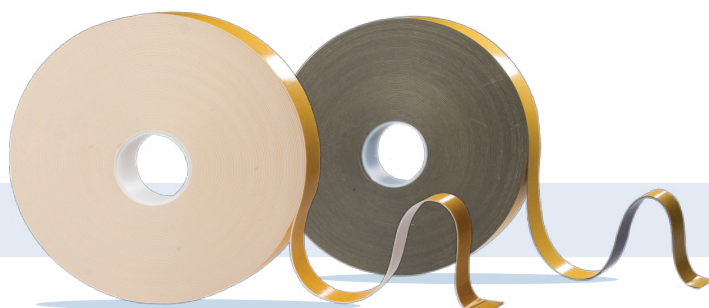


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1603	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.6mm	46m	White and Black

# GEORGIAN BAR TAPE

331 / 3316


Permanent indoor  
and outdoor use.  
Modified acrylic  
adhesive system.

331

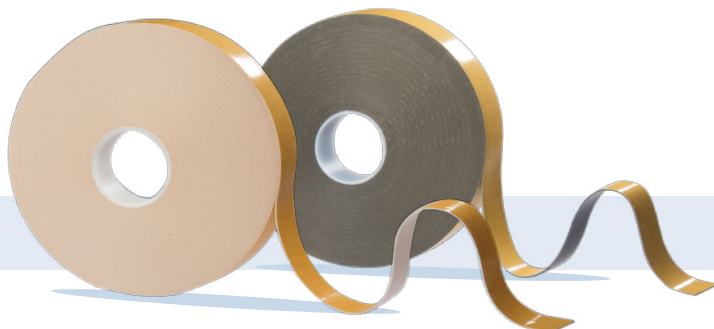

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT331	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm	50m	White and Black

3316

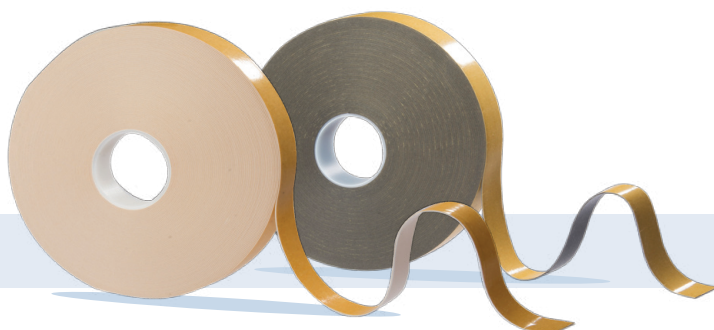

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT3316	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.6mm	46m	White and Black




# GEORGIAN BAR TAPE

1222, 1223 and 1224

High  
Performance  
Georgian  
Bar Tape


1222

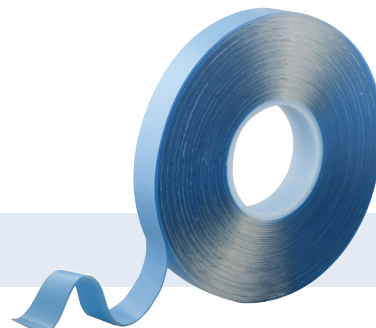

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1222	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm	25m	Clear

High  
Performance  
Georgian  
Bar Tape


1223

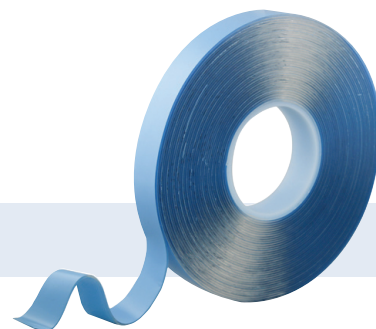

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1223	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.5mm	16.5m	Clear

High  
Performance  
Georgian  
Bar Tape

1224

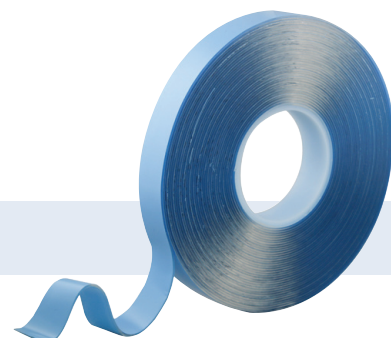


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1224	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	2mm	16.5m	Clear

# GEORGIAN BAR TAPE

1226 / 1228

1226


High  
Performance  
Georgian  
Bar Tape

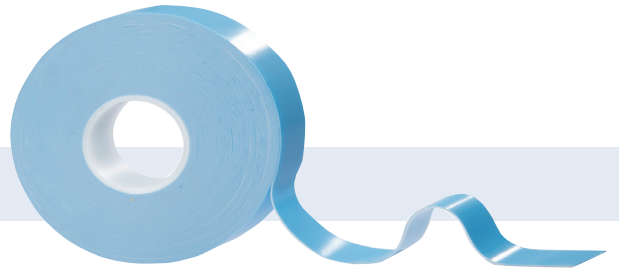

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1226	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.1mm	33m	White

1228

High  
Performance  
Georgian  
Bar Tape

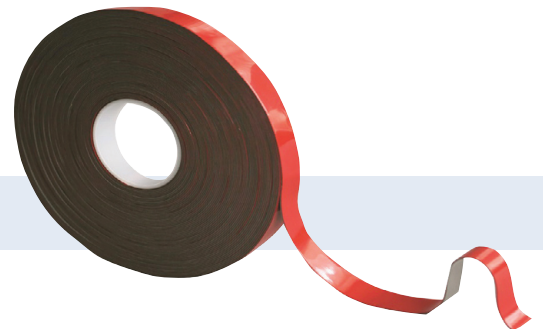

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1228	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm	33m	Black





02

# Glazing Tape



Our 33 Range is our high performance Glazing Tape, a double coated, closed cell PE foam tape in black or white and with a acrylic adhesive system.

Available in 3 thickness (1mm, 1.6mm and 3mm) to suit your tape rebate. The tapes are ideal for Aluminium, UPVC or Timber window production, as they are bonding difficult and dissimilar surfaces including metals, wood, ceramics, plastics and even painted and powder coated finishes.

The PE foam construction provides excellent conformability and is ideal for rough, uneven and unstructured surfaces. In addition the foam offers excellent sealing and vibration absorption, ensuring that bonded joints remain permanently secure even in difficult and exacting applications.

## Our FoamLINK Range;

**FoamLINK 1103H+** – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

**FoamLINK 1603H+** – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper or filmic release liner

**FoamLINK 3003H+** – 3mm thick, PE Foam with a Modified Acrylic Adhesive, Black with a paper or filmic release liner

## Why use FoamLINK Range:


- Specified for Aluminium, UPVC and Timber Glazing
- It has a fantastic initial tack
- Acrylic adhesive coated onto a closed cell, PE foam.
- Easy to remove paper or filmic release liner
- High shear, high peel, highly cohesive mass
- Excellent resistance to stress and vibration, forces which are experienced within the window application.
- Resists UV exposure and withstands household cleaners



# GLAZING TAPE


1103H+ / 1603H+ / 3003H+

## 1103H+

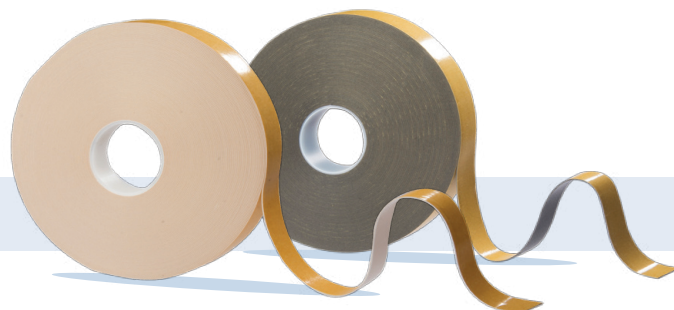


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1103	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm	50m	White and Black

## 1603H+

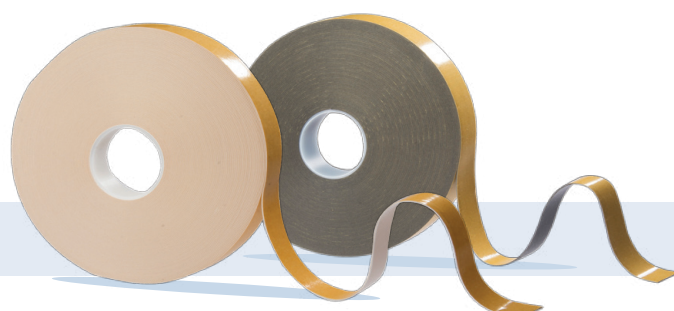

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1603	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.6mm	46m	White and Black

## 3003H+

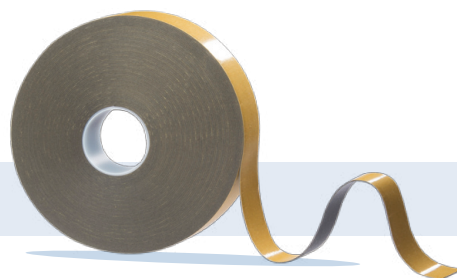

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT3003	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	3mm	26m	Black



03

# Security Glazing Tape

We offer our 33 Range as our Closed Cell PVC Foam Tape, Security Glazing Tapes.

Available in 1mm, 2mm, 3mm, 4mm, 5mm, 6mm, 7mm and 8mm thick.

The security glazing tapes we offer have an extremely high initial tack and an extremely durable PVC foam to enable compression when in application.


### Benefits of using our Security Glazing Tape:

- High performance Closed Cell PVC Foam
- High initial tack
- Mass range of thickness (1mm upto 10mm )
- Bespoke widths available (10mm and 12mm from stock)
- Black or White colours available



# SECURITY GLAZING TAPE

## 33 Range

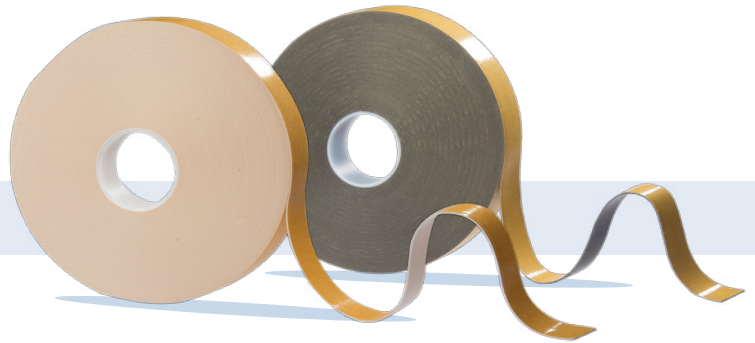

## 33 Range

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT33	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm, 2mm, 3mm, 4mm, 5mm, 6mm,	50m, 25m, 20m, 12m, 10m, 20m	White & Black



### Why use our 33 range:

- Buy direct from the manufacturer
- No minimum order quantity
- Lead times of 2-3 days
- Extremely high tack solvent acrylic adhesive system
- Durable and dense closed cell PVC Foam

04

## Trim Tape

We offer our 331 for the trim application, this double sided superior closed cell PE foam has a ultra high performance modified acrylic adhesive system.

The 331 PE foam construction, provides excellent conformability and is therefore ideal for rough, uneven and structured surfaces. In addition the foam offers excellent sealing damping and vibration absorption capabilities, ensuring that bonded joints remain permanently secure, even in critical and exacting applications.

331 has good initial tack, combined with its superior bonding characteristics, enabling easy assembly and positioning. This product is therefore ideal for all permanent fixing and mounting applications of component parts, even for outdoor use.

Permanent -  
Indoor &  
outdoor use.  
Modified acrylic  
adhesive system.



### Why use 331:


- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Modified Acrylic adhesive coated onto a PE foam
- Temperature resistance of -40°C to +70°C
- Easy to remove Paper release liner
- High shear, high peel, high cohesive mass.

# TRIM TAPE

331

Best selling trim tape  
Fantastic initial tack  
9mm and 10mm wide  
stock held  
Competitive pricing

331

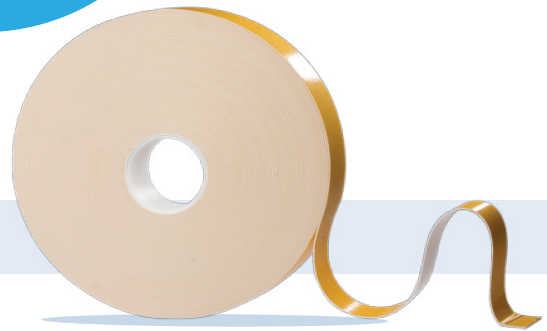

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT331	8mm, 9mm, 10mm, 12mm, 15mm	1mm	50m	White & Black



## Why use the 331:

- 1mm thick PE Foam
- 9mm and 10mm wide held in stock
- White or Black (White is our best seller)
- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere to plastics. So the perfect trim tape.
- It has a fantastic initial tack.
- Competitive pricing

05

## Single Sided Foam Tape

Market leading  
range of Single  
Sided Foam Tape

We offer a range of Single Sided Foam Tapes to suit all requirements.

### 5000 Range:

PVC Foam, Self-Wound with an acrylic adhesive

- Medium Density PVC
- Thickness available 1.5mm, 3mm, 4.5mm, 6mm, 8mm
- Any width from 6mm up-to 1000mm, in Black with a Acrylic adhesive system
- No MOQ is required on the SBV Range
- lead time of 2-3 days

### 78103:

PVC Foam, Acrylic adhesive, lined (each roll can be boarded and shrink wrapped to ensure it stay compact through transit and storage)

- Thickness of 1mm, 2mm, 3mm, 4mm, 5mm, 6mm, 7mm & 8mm available, any width from 6mm up to 1000mm
- Black or White
- MOQ is 1 full Log Yield & multiples of thereafter, dependent upon material yield achieved
- Lead time 1-2 weeks
- Very competitive price point

### 76103:

PE Foam, Acrylic adhesive, Lined (each roll can be boarded and shrink wrapped to ensure it stay compact through transit and storage)

- thickness of 1mm, 2mm, 3mm, 4mm, 5mm, 6mm, 7mm & 8mm available, any width from 6mm up to 1000mm
- Black or White
- MOQ is 1 full Log Yield & multiples of thereafter, dependent upon material yield achieved
- Lead time 1-2 weeks
- Very competitive price point



# SINGLE SIDED FOAM TAPE

78103 / 76103 / 5000 range

## 78103

PVC Foam, Acrylic adhesive, lined (each roll can be boarded and shrink wrapped to ensure it stay compact through transit and storage)

Code:	Widths:	Thickness:	Colour:	MOQ
GUKIT78103	Any width from 4mm upto 1250mm	1mm, 2mm, 3mm, 4mm, 5mm & 6mm	White & Black	full Log Yield & multiples of thereafter, dependent upon material yield achieved.



## 76103

PE Foam, Acrylic adhesive, Lined (each roll can be boarded and shrink wrapped to ensure it stay compact through transit and storage)

Code:	Widths:	Thickness:	Colour:	MOQ
GUKIT76103	Any width from 4mm upto 1250mm	1mm, 2mm, 3mm, 4mm, 5mm & 6mm	White & Black	full Log Yield & multiples of thereafter, dependent upon material yield achieved.



## 5000 range

The 5000 Range is a medium density closed cell PVC foam sealant. We can convert to any bespoke width between 6mm upto a logs width of 1000mm wide. No MOQ (minimum order quantity) on our 5000 Range, you can take any roll quantity to suit.

Code:	Widths:	Thickness:	Colour:	MOQ
GUKIT5000	Any width from 4mm upto 1250mm	1.5mm, 3mm, 4.5mm, 6mm, 8mm,	Black	No MOQ





06

# Expanding Foam Tape

The 8000 Range Expanding Foam Tape is ideal for joint sealing and gap filling in a range of applications within the Glass, Glazing & Construction market.

Our Expanding Foam Tape will provide a seal against the most demanding environmental conditions from "Air / Dust" to "Water / Driving Rain" at 600 Pa.

The 8000 Range is a pre-compressed polyurethane foam. Manufactured to ISO 9001 and is approved to DIN 18542 and DIN 4102.

## Why use our 8000 Range:

- Large stocks held for next day delivery
- Any width available
- Competitive pricing
- Each roll shrink wrapped to ensure rolls stay compressed in transit and storage
- Seals against wind, dust, driven rain
- Can be painted over to provide different colour finishes



# EXPANDING FOAM TAPE

## 8000 Range



### 8000 Range

Code:	Size:	Width:	Thickness:	Provides a weather seal in gaps size's between	Fills Gap Size (not involving weather conditions)	Meterage	MOQ	Lead Time
GUKIT8000101538	10mm x 1.5-3mm	10mm	1.5-3mm	1.5-3mm	9mm	8m	1 roll	2-3 days
GUKIT8000151538	15mm x 1.5-3mm	15mm	1.5-3mm	1.5-3mm	9mm	8m	1 roll	2-3 days
GUKIT8000201538	20mm x 1.5-3mm	20mm	1.5-3mm	1.5-3mm	9mm	8m	1 roll	2-3 days
GUKIT800010366	10mm x 3-6mm	10mm	3-6mm	3-6mm	18mm	6m	1 roll	2-3 days
GUKIT800015366	15mm x 3-6mm	15mm	3-6mm	3-6mm	18mm	6m	1 roll	2-3 days
GUKIT800020366	20mm x 3-6mm	20mm	3-6mm	3-6mm	18mm	6m	1 roll	2-3 days
GUKIT800010594	10mm x 5-9mm	10mm	5-9mm	5-9mm	27mm	4m	1 roll	2-3 days
GUKIT800015594	15mm x 5-9mm	15mm	5-9mm	5-9mm	27mm	4m	1 roll	2-3 days
GUKIT800020594	20mm x 5-9mm	20mm	5-9mm	5-9mm	27mm	4m	1 roll	2-3 days
GUKIT8000206124	20mm x 6-12mm	20mm	6-12mm	6-12mm	36mm	4m	1 roll	2-3 days
GUKIT8000306124	30mm x 6-12mm	30mm	6-12mm	6-12mm	36mm	4m	1 roll	2-3 days
GUKIT8000406124	40mm x 6-12mm	40mm	6-12mm	6-12mm	36mm	4m	1 roll	2-3 days
GUKIT8000208164	20mm x 8-16mm	20mm	8-16mm	8-16mm	48mm	4m	1 roll	2-3 days
GUKIT8000308164	30mm x 8-16mm	30mm	8-16mm	8-16mm	48mm	4m	1 roll	2-3 days
GUKIT8000408164	40mm x 8-16mm	40mm	8-16mm	8-16mm	48mm	4m	1 roll	2-3 days
GUKIT80002020204	20mm x 10-20mm	20mm	10-20mm	10-20mm	60mm	4m	1 roll	2-3 days
GUKIT80003020204	30mm x 10-20mm	30mm	10-20mm	10-20mm	60mm	4m	1 roll	2-3 days
GUKIT80004010204	40mm x 10-20mm	40mm	10-20mm	10-20mm	60mm	4m	1 roll	2-3 days
GUKIT80003018323	30mm x 18-32mm	30mm	18-32mm	18-32mm	96mm	3m	1 roll	2-3 days
GUKIT80004518323	45mm x 18-32mm	45mm	18-32mm	18-32mm	96mm	3m	1 roll	2-3 days
GUKIT80006018323	60mm x 18-32mm	60mm	18-32mm	18-32mm	96mm	3m	1 roll	2-3 days
GUKIT80004024402	40mm x 24-40mm	40mm	24-40mm	24-40mm	120mm	2m	1 roll	2-3 days
GUKIT80006024402	60mm x 24-40mm	60mm	24-40mm	24-40mm	120mm	2m	1 roll	2-3 days
GUKIT80008024402	80mm x 24-40mm	80mm	24-40mm	24-40mm	120mm	2m	1 roll	2-3 days

07

# Ceramic Glazing Tape

We offer our Ceramic Glazing Tape for use when glazing a wide variety of insulating and non-insulating fire resistant glass types into internal screens and doors manufactured from timber or steel.

Our advanced production techniques ensure a highly uniform structure enhanced by low thermal conductivity, good handling strength and a smooth surface. Our Ceramic paper products are manufactured from alkaline earth silicate (AES), with a low bio persistence wool, blended with specially selected organic binders to give flexible papers with exceptional characteristics

The Ceramic Glazing Tape has been tested by a number of window system producers, as an integral part of steel and timber glazed systems to BS476 and other equivalent national standards (DIN4102).

**Permanent adhesive - Indoor and outdoor use.**  
High Temperature stability (up to 1200 degrees C).

## Why use our Ceramic Glazing Tape?

- High Temperature stability (up to 1200 degrees C)
- Good Handling strength
- Lightweight
- Excellent flexibility
- Easy to wrap, cut and shape

# CERAMIC GLAZING TAPE

## Ceramic Glazing Tape

**High  
Temperature  
stability**  
(up to 1200  
degrees C)

**Good Handling  
strength  
and excellent  
flexibility**




## Ceramic Glazing Tape

Code:	Widths:	Thickness:	Colour:
GUKITCGT	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1mm, 2mm, 3mm, 4mm, 5mm & 6mm	White & Black

08

## UPVC Door Panel Bonding Tape

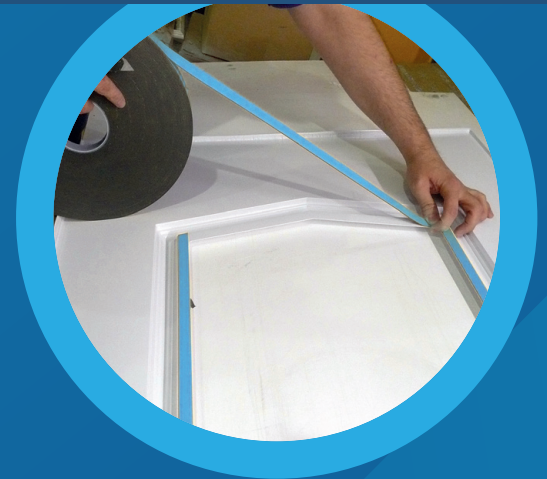

We offer our ProLINK 1500R and FoamLINK 1603H+ for the UPVC Door Panel application. We have supplied these tapes into the UPVC Door Panel manufacturers in the UK & Europe for over 25 years.

The ProLINK 1500R was specifically developed for this demanding application so the performance characteristics are tailored to bond to UPVC Polypropylene, Styrene and other hard to adhere plastics, due to overall high performance and extremely strong bond, the ProLINK 1500R eradicates the need for a silicone cap and will provide a 100% waterproof bond.

Our FoamLINK 1603H+ is a high performance PE foam tape with a specific modified acrylic adhesive system allowing it to provide a ultimate bond to UPVC Polypropylene, Styrene and other hard to adhere plastics. We still recommend to silicone cap when using the FoamLINK 1603H+ but provides high levels of initial tack making glazing a easy and quicker option than silicone's or sealants.

### UPVC Door Panel Tape range:

- **ProLINK 1500R** – High performance, clear, 1.5mm thick, Pure Acrylic Tape, blue filmic release line
- **FoamLINK 1603H+** – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with an amber paper or filmic release liner

### Why use ProLINK 1500R:

- 100% waterproof bond
- Gives a tremendous clean & clear sight line
- No need to silicone cap the panels
- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Temperature resistance of -40°C to 260°C
- Clean easy instant bond
- Quicker production time, as you don't need to wait for sealant to dry

### Why use FoamLINK 1603H+:

- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Modified acrylic adhesive system coated onto a PE foam
- Temperature resistance of -40°C to 90°C
- Easy to remove paper or filmic release liner
- Still need to Silicone Cap when using the FoamLINK 1603H+
- Available in Black or White with either a amber paper (hand tear able) or blue filmic (durable) release liner

# UPVC DOOR PANEL BONDING TAPE


## FoamLINK 1603H+ / ProLINK 1500R

### FoamLINK 1603H+ (white and black)

Permanent adhesive - Indoor & outdoor use.


Modified acrylic adhesive. Temperature range: -40°C to +70°C.

Tremendous high quality foam tape with modified acrylic adhesive. Will bond metals, wood, ceramics, glass, paper and board and is ideally suited to bond hard to adhere to plastics. Very high initial tack combined with tremendous shear and peel qualities.

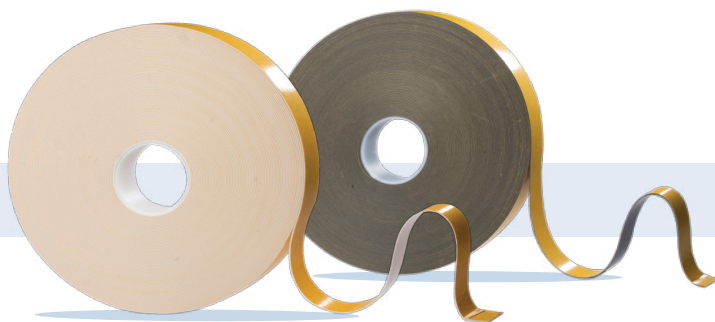

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1603	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.6mm	46m	White & Black

### ProLINK 1500R

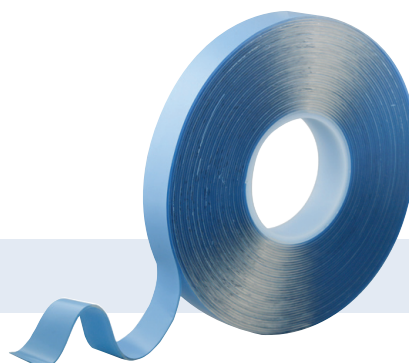

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1500R	10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm	1.5mm	16.5m	Clear


**Permanent  
indoor and  
outdoor use**  
(up to 1200  
degrees C)

**Temperature  
range:**  
**-40°C to +120°C**  
**long term.**



09

## Composite Door Cassette Bonding Tape

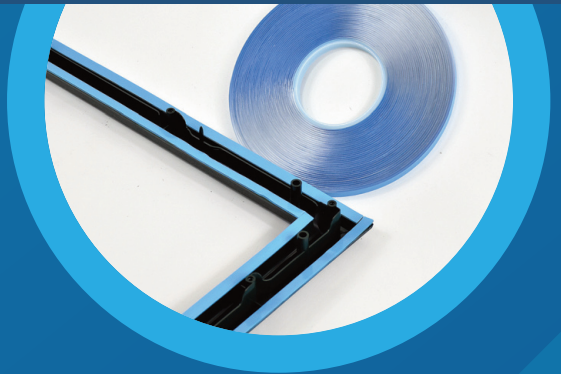

We offer our ProLINK Range and 122 Range for the Composite Door Manufacturers in the UK & Europe, for glazing the cassette system for use within the composite door.

Our ProLINK Range and 122 Range are high performance, clear, pure acrylic adhesive system which has been tested and approved in the Nan-Ya & ODL TriSYS Cassette Systems by Composite Door Manufacturers to PAS 23/24 and SBD.

### Pure Acrylic Range:

**ProLINK 1000R** – Ultra High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

**ProLINK 1500R** – Ultra High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System

**1222** – High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

**1223** – High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System

**1224** – High performance, clear, 2mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

### Why use our Pure Acrylic Range:

- 100% waterproof bond (no need to silicone)
- Approved to PAS 23/24 & SBD, so industry know
- Temperature resistance of -40°C to 260°
- Easy to remove / strong filmic release liner
- Strong initial bond along onto the channels
- Industry used for over 10 Years by leading manufacturers

# COMPOSITE DOOR CASSETTE BONDING TAPE

## Composite Door Cassette Glazing

### Application Guide for The Nan-Ya & ODL Cassette System

- 1) Ensure that the operators are cleaning the cassette down with a suitable solvent before applying the tape (please see page 48 for further information), please note that if the cassette is not cleaned and has any surface dust or dirt then this will not help the performance of the tape.
- 2) When the operators are handling the Prolink, please ensure that the adhesive side of the tape is not touched at all when applying the tape to the cassette, educating the operators on this process will make a considerable difference.
- 3) Regarding storage of the tape, make sure that the tape is not left out on any production bench before, during or after application as this leaves the tape open to picking up dirt, this will again not help the performance of the tape.
- 4) We recommend that after the tape has been applied to the cassette, that the operator uses a roller (our GUKITROLLER see page 49) and run it along the tape after it is applied this will make a massive difference to the adhesive bond and also make it a lot easier to release the Blue HDPE filmic release liner, which will only help efficiency and speed for your production line.
- 5) Once the cassettes have been taped up, please ensure that the cassettes are left for a period of time to let the Prolink's adhesive wet out into the surface and create its ultimate bond.
- 6) On the Nan-Ya cassette system customers have 2 glazing options:
  - a) Overlapping the tape on the corners and leaving the overlap when glazing the cassette. Where the tape has been overlapped apply a spot of Alansons 1101 clear adhesive behind the overlap.
  - b) Cutting the tape back and butt joint it on the corners. If there is a slight gap, especially at the bottom of the cassette, apply a spot of Alansons 1101 clear adhesive.
- 7) On the ODL cassette system we have a number of customer who are overlapping the tape at the corners and leaving the overlap when glazing the cassette, due to the ODL cassette being a screw system the pressure generated from this gives sufficient compression on the tape to ensure that there is no gap for any water ingress.
- 8) On any cassette system when taping, always apply the Prolink to the horizontal channels first, ensuring all vertical joints are butted together tight gap free to create a waterproof seal.
- 9) Once the door and cassette area has been fully cleaned and glazing is complete, apply a fine bead of Alanson's 1101 clear sealant to the bottom of the external cassette meeting the glass and 10mm up vertically at the corner.




# COMPOSITE DOOR CASSETTE BONDING TAPE

ProLINK 1000R / ProLINK 1500R / 1222 / 1223 / 1224

## ProLINK 1000R

Ultra High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1000R	8mm, 9mm, 10mm & 12mm	1mm	25m	Clear



## ProLINK 1500R

Ultra High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1500R	6mm, 8mm, 9mm, 10mm & 12mm	1.5mm	16.5m	Clear



## 1222

High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1222	8mm, 9mm, 10mm & 12mm	1mm	25m	Clear



## 1223

High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System


Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1223	8mm, 9mm, 10mm & 12mm	1.5mm	16.5m	Clear



## 1224

High performance, clear, 2mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1224	8mm, 9mm, 10mm & 12mm	2mm	16.5m	Clear




# COMPOSITE DOOR SLAB TAPE

## Aluminium Vapour Tape

### Aluminium Vapour Tape

An aluminium interleaved tape with a Polyester over-laminate film with a solvent adhesive.

This tape is used for sealing exposed edges of timber/composite doors to protect from water ingress and vapour. It can also be used for sealing other materials to create a barrier where water vapour can be an issue.

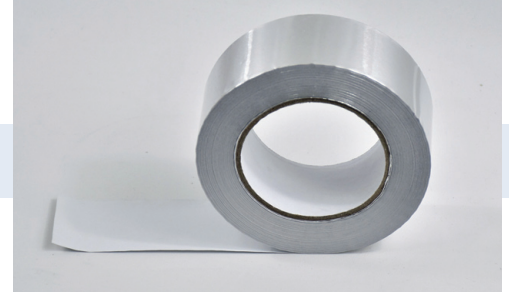


#### Key Features

- Excellent vapour resistance
- Excellent abrasion resistance
- High tack
- Multiple applications

#### Technical Specification

- Aluminium Foil thickness: 0.022mm (22 micron)
- Polyester Film thickness: 0.023mm
- Adhesive: Solvent Acrylic
- Overall thickness: 0.105mm

Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKITAT	20mm, 55mm & 60mm (5mm fingerlift liner)	0.105mm	50m	Silver

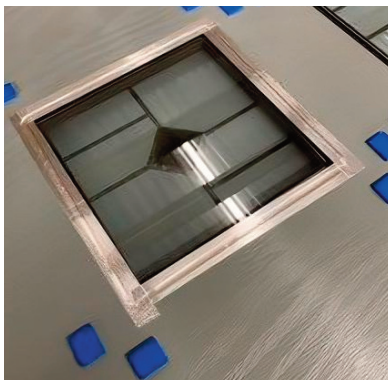

10

# Low Tack Protection Tape

Samples rolls are available upon request.

We offer a range of different Low Tack Protection Tapes to suit your application.

Our range of Low Tacks are tested and approved for applications where temporary protection is required and to have the ability to be peeled away, leaving no residue on the applied surface. Please speak to our Sales Account Executives who can specify the correct low tack production tape for your application and surface requirement.

### Our Low Tack Protection Tape range:

#### **0803CL: White on Black Protection Tape**

80 Micron thick.

White on Black Low Tack Protection Tape may be used to protect sensitive surfaces against mechanical damage, dust and dirt during transport, storage, or assembly. This product is excellent for use where you need to write on the finished product. As this film has a white finish this allows marking of the product through production stages, if required.

#### **781: Black Protection Tape**

100 Micron thick.

Our premium surface protection tape, which protects lacquered plates, plastics and other matt surfaces during storage, transportation and light mechanical processes.

#### **1009: Clear Protection Tape**

100 Micron thick.

Our 1009 is ideal for protecting product within the glass & glazing industry. Ideal for use on UPVC, Wood and Aluminium to provide a protection of materials through production, transport, and installation.

#### **Nitto 4088H: Clear Protection Tape**

80 Micron thick.

Our premium 4088H is a surface protection tape, which protects lacquered plates, plastics and other matt surfaces during storage, transportation, and light mechanical processes.

#### **782: Blue Protection Film**

30-50 Micron

Can protect sensitive surfaces against mechanical damage and dust or dirt in transport transit, storage, and assembly. Ideal for Glass protection.



# LOW TACK PROTECTION TAPE


0803CL / 781 / 1009 / Nitto 4088H / 782

## 0803CL



Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT0803CL	15mm, 20mm, 30mm, 38mm, 50mm, 60mm, 70mm, 80mm, 90mm, 100mm, 650mm, 1500mm	80 micron	100	White on Black
GUKIT0803CLPRINTED	1500mm	80 micron	100	White on Black with print on white side.

## 781



Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT781	15mm, 20mm, 30mm, 38mm, 50mm, 60mm, 70mm, 80mm, 90mm, 100mm, 650mm, 1500mm	100 micron	100m	Black

## 1009




Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT1009	15mm, 20mm, 30mm, 38mm, 50mm, 60mm, 70mm, 80mm, 90mm, 100mm, 650mm, 1500mm	100 micron	100m	Clear

## Nitto 4088H



Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT4088	15mm, 20mm, 30mm, 38mm, 50mm, 60mm, 70mm, 80mm, 90mm, 100mm, 650mm, 1500mm	80 micron	100m	Clear

## 782



Code:	Widths:	Thickness:	Metres per roll:	Colour:
GUKIT782	15mm, 20mm, 30mm, 38mm, 50mm, 60mm, 70mm, 80mm, 90mm, 100mm, 650mm, 1500mm	100 micron	100m	Blue



11

# Smart Systems Approved Tapes



Here at UK Industrial Tapes we have a range of tapes compatible with smart systems that are used very widely in the fabrication and glazing industry.

## Evolution Window & Alitherm 47 Heritage Window

### Glazing Tape

- FoamLINK 3003H+ (Black only)
- GUKIT300310326B / 10mm x 3mm x 26M

### Glazing Tape

- FoamLINK 1603H+ (White or Black)
- GUKIT1603101646 / 10mm x 1.6mm x 46M

### Georgian Bar Tape

- FoamLINK 1103H+ (White or Black)
- FGUKIT110310150 / 10mm x 1mm x 50m  
For use on the UN3220 Georgian Bar
- FGUKIT110315150 / 15mm x 1mm x 50m  
For use on the W20165 Georgian Bar
- FGUKIT110320150 / 20mm x 1mm x 50m  
For use on the W20166 Georgian Bar

### Security Glazing Tape

- 68130 (White or Black)
- GUKIT6813030420 / 30mm x 4mm x 20M

### Low Tack Protection Tape


- 0803CL – Used on Standard profiles (Not the Sensation or KL 14)
- 80 Micron thick White on Black Low Tack Protection Tape
- 1009 – Used for the Sensations Range only (Not for use on the KL 14)
- 100 Micron thick Clear Low Tack Polythene Tape
- 8512 – Used for the Grey KL14ST System only (Not for use on the Sensations Range)
- 88 micron thick Green Polyester Tape

For samples or a quotation of our range, please advise our Sales Account Executives, who shall arrange free samples for you to evaluate: [sales@ukindustrialtapes.co.uk](mailto:sales@ukindustrialtapes.co.uk)

# SMART SYSTEMS APPROVED TAPES


## Approved Tapes

### Glazing Tape FoamLINK1603H+

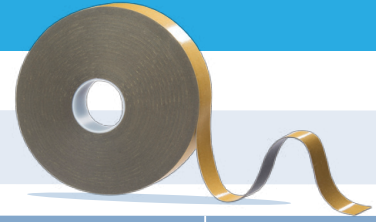


Code:	Colour:	Size:	Thickness	RPC:
GPAL1603101646	Black or White	10mm x 1.6mm x 46m	1.6mm	30

### Glazing Tape FoamLINK 3003H+

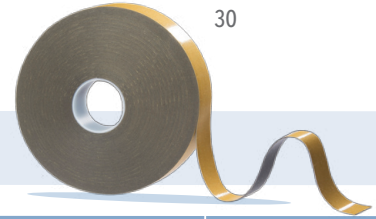

Code:	Colour:	Size:	Thickness	RPC:
GPAL300310326B	Black	10mm x 3mm x 26m	3mm	30

### Georgian Bar Tape FoamLINK 1103H+

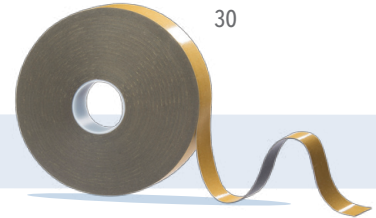

Code:	Colour:	Size:	Thickness	RPC:
GPAL110315150	Black or White	15mm x 1mm x 50m	1mm	30

### Low Tack Protection Tape 0803CL




Code:	Colour:	Size:	Thickness	RPC:
GPRO15001000803CL	Black or White	1500mm x 100m	Product can be slit to fit your specification	

### Sensations Range 1009



Code:	Colour:	Size:	Thickness	RPC:
TRAW10091205100	Clear	1205mm x 100m	Product can be slit to fit your specification	

### 8512 for the Grey KL14ST System



Code:	Colour:	Size:	Thickness	RPC:
GUKIT8512800100	Green	1200mm x 100m	Product can be slit to fit your specification	

## 122 RANGE - HIGH PERFORMANCE BONDING TAPES


12

# High Performance Bonding Tapes

The 122 Range pure acrylic tapes are ultra high performance tapes, made up of both transparent bonding films and foamed acrylic adhesives.

All manufactured using a cutting edge, 100% acrylic mass technology.

With a special composition giving excellent all round bonding properties and unique characteristics that allow for very high performance in many demanding application.

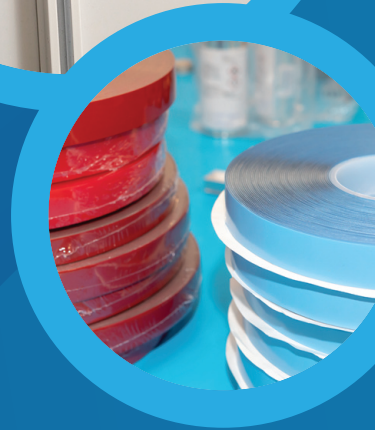

### 122 Range (Pure Acrylic Tape) :

1220 – High Performance, 0.25mm thick, Clear Pure Acrylic Tape with a white paper release liner

1221 – High Performance, 0.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1222 – High Performance, 1mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1223 – High Performance, 1.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1224 – High Performance, 2mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1212 – High Performance, 1mm thick, Clear Pure Acrylic Tape with a red filmic release liner

1213 – High Performance, 1.2mm thick, Grey Foamed Acrylic Tape with a red filmic release liner

1226 – High Performance, 1.2mm thick, White Foamed Acrylic Tape with a red filmic release liner

1228 – High Performance, 1mm thick, Black Foamed Acrylic Tape with a red filmic release liner

1229 – High Performance, 2mm thick, Black Foamed Acrylic Tape with a red filmic release liner

### Benefits of using 122 Range:

- Ultra high performance bonding tapes
- 100% waterproof bond on most application
- Easy remove release liner
- Excellent clarity (On the 1220, 1221, 1222, 1223, 1224 and 1212)
- Superb resistance to environmental factors, including UV, ageing etc.
- Excellent temperature resistance.

# 122 RANGE - HIGH PERFORMANCE BONDING TAPES

## 122 Range

### 1220

Code:	Performance	Size:	Colour	Description:
1220	High performance	0.25mm thick	Clear	Pure Acrylic Tape with a white paper release liner

### 1221

Code:	Performance	Size:	Colour	Description:
1221	High performance	0.5mm thick	Clear	Pure Acrylic Tape with a blue filmic release liner

### 1222

Code:	Performance	Size:	Colour	Description:
1222	High performance	1mm thick	Clear	Pure Acrylic Tape with a blue filmic release liner

### 1223

Code:	Performance	Size:	Colour	Description:
1223	High performance	1.5mm thick	Clear	Pure Acrylic Tape with a blue filmic release liner

### 1224

Code:	Performance	Size:	Colour	Description:
1224	High performance	2mm thick	Clear	Pure Acrylic Tape with a blue filmic release liner

### 1212

Code:	Performance	Size:	Colour	Description:
1212	High performance	1mm thick	Clear	Pure Acrylic Tape with a red filmic release liner

### 1213

Code:	Performance	Size:	Colour	Description:
1213	High performance	1.2mm thick	Grey	Foamed Acrylic Tape with a red filmic release liner

### 1226










Code:	Performance	Size:	Colour	Description:
1226	High performance	1.2mm thick	White	Foamed Acrylic Tape with a red filmic release liner

### 1228

Code:	Performance	Size:	Colour	Description:
1228	High performance	1mm thick	Black	Foamed Acrylic Tape with a red filmic release liner

### 1229

Code:	Performance	Size:	Colour	Description:
1229	High performance	2mm thick	Black	Foamed Acrylic Tape with a red filmic release liner




14

# Flashing Tape

We strive to offer the ultimate range of high-performance Flashing Tapes

Our waterproofing flashing tapes create the ultimate bond instantly with our high-tack bitumen and butyl adhesive which will then provide a permanent waterproof seal in application.

The flashing tape is laminated with either a lead effect material or an aluminium effect material, which is flexible to apply and is positioned into place by hand.

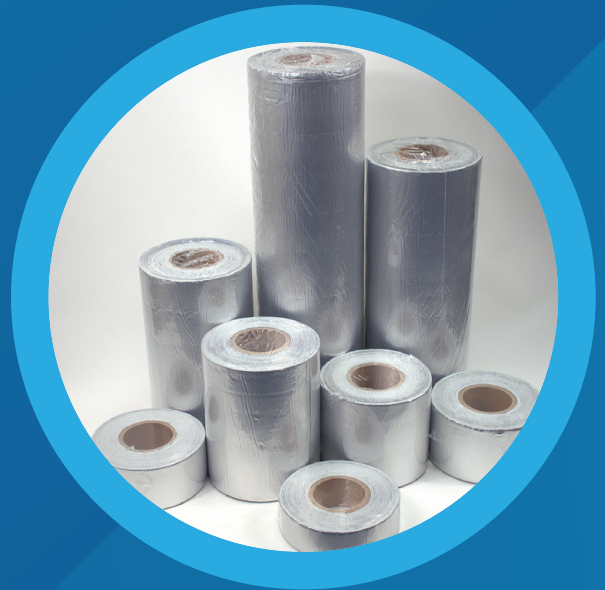

## Application for our Flashing Tape:

- The flashing tape bonds to most surfaces including concrete, wood, slates, brick, metal, glass, plastic, roofing felt and roof tiles.
- It can be used to repair lead flashing, sealing roof ridges, flashing of skylights, sealing leaks in drain pipes and guttering, flashing bituminous felt, protecting pipe and tank insulations, repairing green houses and generally can be applied in a large number of construction and maintenance situations.

## How to apply our Flashing Tape:

- Cut a section of the flashing tape to length, removing the release liner before placing the tape into position. Use a seam roller to ensure all edges and overlaps are firmly sealed. When overlapping allow a minimum of 25mm. Do not use in temperatures below 5°C and if below 15°C application will be easier by storing the flashing tape in a warm environment prior to use.
- All surfaces must be dry, clean and free from grease, dust, oil, loose materials and water. If used on concrete or other porous surfaces then a suitable primer should be used.




# FLASHING TAPE


## FLASHING TAPE

### Flashing Tape

Our waterproofing flashing tapes create the ultimate bond instantly with our high-tack bitumen and butyl adhesive which will then provide a permanent waterproof seal in application.

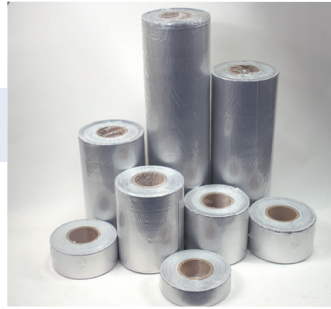

Code:	Reference:	Adhesive	Thickness:	Colour:	Widths:	Length:
1001	Lead effect	Bitumen	1.2mm	Grey	50mm, 75mm, 100mm, 150mm, 225mm, 300mm, 450mm and 600mm (other sizes available upon request)	10m or 3m retail rolls
1003	Aluminium effect	Butyl	1mm and 1.5mm	Silver	50mm, 75mm, 100mm, 150mm, 225mm, 300mm, 450mm and 600mm (other sizes available upon request)	10m or 3m retail rolls

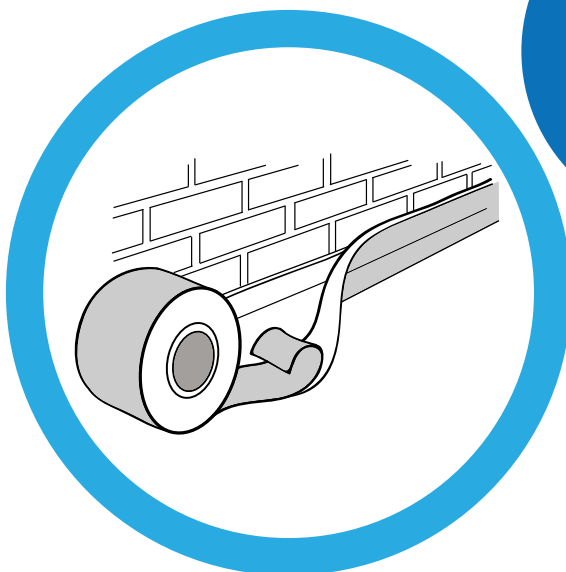

The flashing tape is laminated with either a lead or aluminium effect material

15

# Packaging and Application Products

We offer a vast range of ancillary products for the Glass, Glazing and Construction packing and protecting applications.

Our products are ideal for packing and support for Windows, Doors and other products in a production or transport environment where it is vital to keep the finished product securely protected.

We produce our tapes in a range of widths and thickness and our glazing pads, pallet wrap and mini rolls and PTFE tape in a number of sizes and colours to suit your requirement.



We are always adding and developing our product range so that we can offer you a solution to your application.

For further information please contact our sales department.

**0191 269 7810**



# PACKAGING AND APPLICATION PRODUCTS


## High Quality Glass Transit Pads

### High Quality Glass Transit Pads

High density foam glazing pads. Our glass transit pads feature a peel-able adhesive backing. We use a very strong high quality PVC foam in the production of our transit pads. The PVC foam is coated with a low tack adhesive system that will not leave an adhesive residue on the glass



Code:	Colour:	Size:	Thickness:	RPC:
GUKIT2218510000BLUE	Blue	22mm x 18mm x 4.2mm	4.2mm	10,000 pads per roll
GUKIT2218510000RED	Red	22mm x 18mm x 4.2mm	4.2mm	10,000 pads per roll

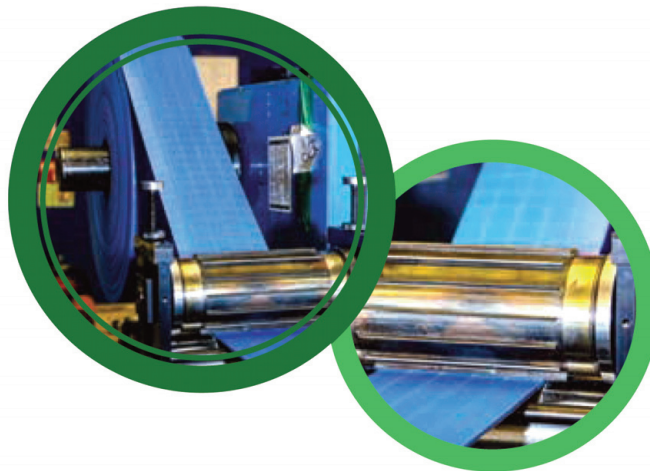

Coated with a low tack adhesive system that will not leave an adhesive residue on the glass.



Before use please ensure the surface is clean and dry by using an alcohol based Isopropanol cleaner



### 79P/2 Self Adhesive Waterproof Cloth Tape


We offer our 79P/2 Cloth tape in black and silver but other colours are available upon request. We coat our 79P/2 with a Solvent Rubber adhesive.



Code:	Widths:	Metres per roll:	Colour:
GUKIT79P/2	19mm, 24mm, 36mm, 38mm, 43mm, 48mm, 70mm, 75mm, 80mm	50m	Black, Silver, White, Green, Blue Red

### PTFE Tape

Our self adhesive PTFE is perfect for your welding heads. It is high quality and long lasting in this demanding application.

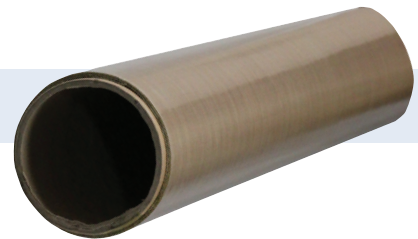

Code:	Width:	Thickness:	Metres per roll:
GUKIT1603	1m (1000mm)	6 Tho	5m, 10m or 30m

Before use please ensure the surface is clean and dry by using an alcohol based Isopropanol cleaner


# PACKAGING AND APPLICATION PRODUCTS

## Aluminium Tape

### Aluminium Tape – 1012 Lined

Our 1012 is our 30 micron lined aluminium tape. It has a ultra aggressive acrylic adhesive system. Ideal for application such as HVAC sealing of joints, jointing of aluminium insulation boards, flexible air duct seams and connections. General purpose holding, patching, sealing and masking applications internal and external.

Approved to Class "O" approval. Tested in accordance with BS476: Part6:1989 +A1:2009 and BS476: Part7:1997.

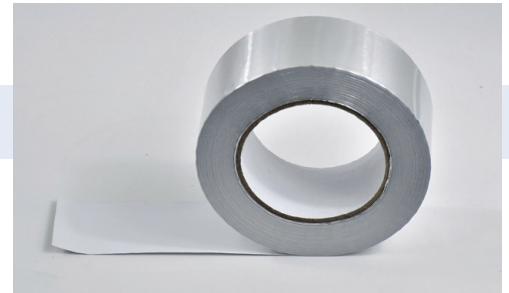

Code:	Colour:	Sizes:
1012	Silver	50mm x 45.7m   24 rolls per box 75mm x 45.7m   16 rolls per box 100mm x 45.7m   12 rolls per box





### General Purpose Masking Tape

General Purpose Masking Tape is cream in colour with a clear adhesive, the adhesive is very aggressive and sticks very well to itself.



Code:	Colour	Size	RPC
PMAN1950	Cream	19mm x 50m	96
PMAN2550	Cream	25mm x 50m	72
PMAN3850	Cream	38mm x 50m	48
PAMN5050	Cream	50mm x 50m	36

### TESA 4323 Masking Tape

Tesa 4323 Masking Tape is a good quality masking tape which tends to be thicker than most products currently used, it is cream in colour with a aggressive white adhesive system.




Code:	Colour	Size	RPC
FTES43231950	Cream	19mm x 50m	96
FTES43232550	Cream	25mm x 50m	72
FTES43233850	Cream	38mm x 50m	48
FTES43235050	Cream	50mm x 50m	36

# PACKAGING AND APPLICATION PRODUCTS

## Pallet Wrap and Mini Rolls

### Pallet Wrap


We offer Pallet Wrap from stock in the sizes as below.

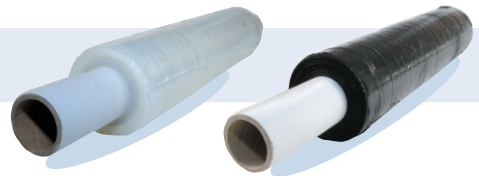

Code	Colour	Size	Thickness	RPC
PNOR40030012M	Clear	400mm x 300m	12 Micron	6
PNOR40030012MUBLACK	Black	400mm x 300m	12 Micron	6

### Mini Rolls

The clear film will only stick to itself not to anything else.  
Use it for bundling, wrapping and protecting frames.  
Great for attaching fixings to frames for transit to site.

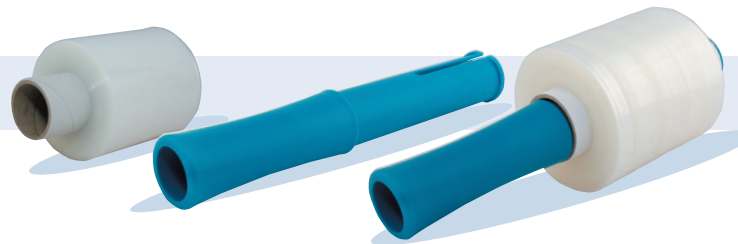


Code	Colour	Size	Thickness	RPC
F100DIS	Blue	Mini Roll Dispenser	-	-
FSTC10015020	Clear	100mm x 150m	20 Micron	40
FSTC10030020	Clear	100mm x 300m	20 Micron	18

# PACKAGING AND APPLICATION PRODUCTS

## Packaging Tape and Printed Tape

### Packaging Tape

Easy to use low noise tape with a high tack strong adhesive system.

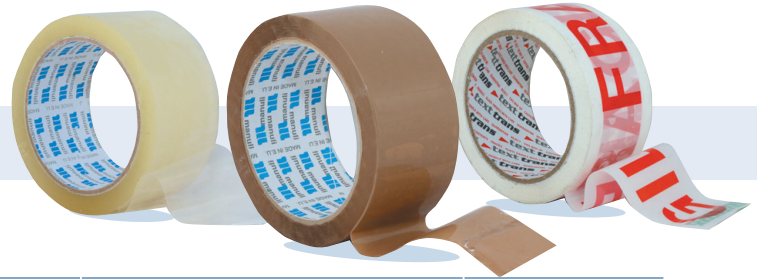

Code	Colour	Size	RPC
PMUR022566C	Clear	25mm x 66m	72
PMURU35066C	Clear	50mm x 66m	36
PMURU35066BU	Buff	50mm x 66m	36
PCONFRAGILE	Printed	50mm x 66m	36

### Tape Dispenser



Code:	Description
PADP50DISPD712	Hand Dispenser 50mm

### Printed Tape

We can bespoke print any text or your company's branding onto the tape.



Code:	Width:	Metres per roll:	Colour options:	RPC:	MOQ:
GUKITPT	48mm	66m	1 upto 4 colours	72	72

# PACKAGING AND APPLICATION PRODUCTS

## Adhesive Tape Pressure Roll / Disinfectant Cleaning Wipes

The correct initial preparation of the surface the adhesive tape is bonding too is key to ensure the tape can perform and create the ultimate bond over time. Therefore we supply a range of Cleaning and Preparation products to suit certain applications and substrates.

### Our range;

- Isopropanol Cleaner Bottles (Surface Cleaner)
- Isopropanol Cleaner Sachets (Surface Cleaner)
- PrimeLINK RS (Surface Cleaner and Activator)
- Disinfectant Cleaning Wipes
- Adhesive Tape Roll (Pressure applicator)

### Adhesive Tape Pressure Roll

Our UKIT Adhesive Tape Roller is an ideal product to use alongside our adhesive tapes once the tapes have been applied onto the surface / application, to then provide a even pressure force, allowing and assisting the tape to cure, flow and bond into the surface. As



Code:	Colour:	Size:
GUKITROLLER	-	one size

### Disinfectant Cleaning Wipes

Our disinfectant cleaner wipes are perfect for use in a retail, industrial or office based environment. Water based, with 500 sheets (sheet size 190mm x 200mm) per tub.

We have our tubs held in stock with plain label. So if required, we can own brand the tubs for you with your company branding.



Code:	Colour:	Sizes:
GukitcleaningwipesWB	White sheets	500 wipes per tub Wipe size is 190mm x 200mm 3 tubs per box. 20 boxes per pallet

# PACKAGING AND APPLICATION PRODUCTS

## Isopropanol Cleaner Bottles + Sachets / PrimeLINK RS

### Isopropanol Cleaner Bottles

We offer the UKIT Isopropanol Cleaner which will assist the preparation and cleaning of the surface before application.

50/50 mix of pure alcohol and water.

This is the ideal product to clean a surface before the application of any adhesive tape.



Code:	Colour:	Size:
GUKITISOPROP1L	-	1 litre bottles

### Isopropanol Cleaner Sachets

We offer the UKIT Isopropanol Cleaner Sachets which will assist the preparation and cleaning of the surface before application.



Code:	Colour:	Size:
GUKITISOPROPSACHET	-	1 sheet per sealed paper sachet

### PrimeLINK RS

Our PrimeLINK RS is a Cleaner and Activator in one.

It is particularly easy to process because it is delivered ready to use. In all cases it must be applied to clean, dry surfaces.

Our PrimeLINK RS is applied with a brush or dried cloth in a thin, uniform coat. After applying our PrimeLINK RS it is recommended to wait 1 or more minutes to leave it time to dry, at room temperature, before applying an adhesive tape on the primer-prepared surface.



Code:	Colour:	Size:
GUKITPRIMELINKRS250ML	-	250ml and 500ml tins

Our PrimeLINK RS is particularly recommended for use with the following surfaces:

- Aluminium
- Polished and unpolished stainless steel
- Painted, zinc plated and chrome plated steel
- Plastics: polyamide, polycarbonate, ABS etc.
- Powder coated substrates

Our PrimeLINK RS can be used in conjunction with:

- Urethane adhesives
- Epoxy adhesives
- Acrylic adhesive



# HOW TO ORDER

## How to order:

We pride ourselves on high product quality combined with excellent customer service to offer a reliable, consistent, and innovative supply. With our vast range of adhesive tapes and adhesive products, we strive to offer the ultimate solution for all your application requirements.

Our Sales Account Executives are on hand to offer market leading product knowledge to ensure you are supplied the correct tape for your application.

## Contact us on the below:

T: 0191 269 7810

E: [sales@ukindustrialtapes.co.uk](mailto:sales@ukindustrialtapes.co.uk)

HQ: Brumwell House  
Westway Industrial Estate  
Throckley  
Newcastle  
Tyne & Wear  
NE15 9EW

## Keep up with UK Industrial Tapes via our Social Media platforms:



## Privacy Policy

Any information you provide us with is treated as confidential. Please take a moment to read our full privacy policy which can be found on our website [www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk)

## Returns Policy

All our goods are checked before dispatch and we hope you will find no cause for complaint. If you do, our full returns policy can be found on our website [www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk)

## Customer Feedback

UK Industrial Tapes is completely dedicated to your total satisfaction. If you have any suggestions or comments please get in touch. If you have reason to contact us about our service, then please email us at [sales@ukindustrialtapes.co.uk](mailto:sales@ukindustrialtapes.co.uk)

## Delivery

In the UK stock items will be shipped within two days. We will notify you by email the despatch date on receipt of the order. Free carriage on orders over £100 in the UK. For orders below £100 there is a carriage charge of £10. Any changes or updates to this can be found on our website.

For delivery outside of the UK, charges are to be agreed depending on the volume of the order invoice.

## VAT

For all orders dispatched to mainland UK VAT will be added.

## Invoice

We can invoice in Sterling, Euros or Dollars to suit the customer.

## Terms and Conditions of Sale

All sales are subject to our detailed Terms and Conditions of Sale, the current version of which is available either from our website [www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk), or from the address below. Please note that the Terms and Conditions may be subject to change from time to time. By placing an order to purchase any of the items listed in this catalogue you will be accepting that our Terms and Conditions of Sale apply to that order. If you do not agree to our Terms and Conditions of Sale, please contact our sales team to discuss further.

Please note that the Terms and Conditions of Sale are subject to English law and that all disputes arising in connections with any sale will be subject to the jurisdiction of the courts of England and Wales.

If you have any questions about our Terms and Conditions of Sale or would like us to send you a copy, please contact us at:

UK Industrial Tapes Ltd. Brumwell House, Westway Industrial Estate, Throckley, Newcastle Upon Tyne, NE15 9EW, UK

[sales@ukindustrialtapes.co.uk](mailto:sales@ukindustrialtapes.co.uk)

0191 269 7810

[www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk)

# GLASS & GLAZING

## HIGH PERFORMANCE ADHESIVE TAPES



**UK Industrial Tapes Ltd**

UK Industrial Tapes Ltd  
Brumwell House  
Westway Industrial Estate  
Throckley  
Newcastle Upon Tyne  
NE15 9EW

[sales@ukindustrialtapes.co.uk](mailto:sales@ukindustrialtapes.co.uk)

**0191 269 7810**

[www.ukindustrialtapes.co.uk](http://www.ukindustrialtapes.co.uk)