

EDITION 06

GLASS & GLAZING

HIGH PERFORMANCE ADHESIVE TAPES



UK INDUSTRIAL TAPES^{LTD}

www.ukindustrialtapes.co.uk

WELCOME

UK Industrial Tapes Ltd are a leading Manufacturer, Converter and Supplier of high-performance Adhesive Tapes and Adhesive products.

With over 28 years' experience, we have become a major supplier of high-performance tapes and packaging products into Glass and Glazing market.

Priding ourselves on high product quality combined with excellent customer service to offer a reliable, consistent and innovative supply. With our vast range of high-performance tapes and packaging products we strive to offer the ultimate solution for all your application requirements.



ACCREDITATIONS

INVESTORS IN PEOPLE®
We invest in people Gold

FOLLOW US ON SOCIAL MEDIA





CONTENTS

| | | | |
|--------------------------------------|----|------------------------------------|----|
| GEORGIAN BAR TAPE | 4 | SMART SYSTEMS APPROVED TAPES | 34 |
| GLAZING TAPE | 10 | HIGH PERFORMANCE BONDING TAPES | 36 |
| SECURITY GLAZING | 12 | FLASHING TAPE | 38 |
| TRIM TAPE | 14 | AIRTIGHTNESS TAPES | 40 |
| SINGLE SIDED FOAM TAPE | 16 | PACKAGING AND APPLICATION PRODUCTS | 46 |
| EXPANDING FOAM TAPE | 18 | HOW TO ORDER | 54 |
| CERAMIC GLAZING TAPE | 20 | LEGAL INFORMATION | 55 |
| UPVC DOOR PANEL BONDING TAPE | 22 | | |
| COMPOSITE DOOR CASSETTE BONDING TAPE | 24 | | |
| COMPOSITE DOOR SLAB TAPE | 27 | | |
| LOW TACK PROTECTION TAPE | 28 | | |



The main two core values which run through UK Industrial Tapes are 'The Customer' and 'Continual Quality'.



GEORGIAN BAR TAPE



Georgian Bar Tape

We offer a range of high performance double sided tapes for the Georgian (astragal) bar application.

Our **FoamLINK 1103, 33 Range and 122 Range** tapes which we recommend for the Georgian Bar Application have excellent UV resistance (use indoor & outdoor) and tremendous Peel & Shear strength which is critical factor for this demanding application to ensure the bars stay in situ.

Our tapes are tested and industry approved for bonding bar system materials, such as aluminium, upvc and wooded Georgian Bars to glass and and have been used for over 28 years.

Georgian Bar Tapes we offer:

FoamLINK 1103H+ – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

FoamLINK 1603H+ – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

331 – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

3316 – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper or filmic release liner

1222 – High Performance, 1mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1223 – High Performance, 1.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1224 – High Performance, 2mm thick, Clear Pure Acrylic Tape with a blue filmic release liner

1226 – High Performance, 1.1mm thick, Foamed Acrylic, in White with a red filmic release liner.

1228 – High Performance, 1mm thick, Foamed Acrylic, in Black with a red filmic release liner.

Our range of Georgian Bar Tapes are approved on the below Bar Systems by our customers, contact our Sales Account Executives who can specify the correct tape for your bar system;

Rehau, Deceuninck, Geo Fast, Smart System, R9

Benefits of using Georgian Bar Tapes:

- Buy direct from the manufacturer and converter
- Can offer bespoke tape widths to suit the bar system
- Range of thickness and colours
- Fantastic high initial tacks
- Excellent resistance to stress and vibration
- Resists UV exposure for internal and external use

Georgian Bar Tape

APPLICATION GUIDE

We have a few recommendations to ensure you get the best results using our 33 range, 122 range, FoamLINK, ProLINK, CustomLINK and FlexLINK range on the Georgian Bar application.

1. Our 33 Range, 122 Range, FoamLINK, ProLINK, CustomLINK and FlexLINK products have a PSA "pressure sensitive adhesives" system, therefore when applying our product please make sure sufficient pressure is applied when being adhered to its application.

2. Please ensure that the surfaces the tape will be adhered to are clean from all dirt and dust by using an isopropanol cleaner, (please contact us for details on our recommended cleaner).

3. Please note that if the bars are cut too tight to the frame this will cause stress on the adhesive tape bond, we then suggest to leave an approximate 1mm gap between the bar and the frame at each end of the bar this will allow for expansion and contraction of the surfaces.

4. We also recommend that once the windows & bars have been glazed up, leave the finished product in despatch for at least 72 hours, before they are despatched, this will make a massive difference to the performance of the tape. All Acrylic adhesive systems take 72 hours to reach their optimum bond.


If you have any further queries regarding, please contact our Technical Sales Department on;
E: sales@ukindustrialtapes.co.uk
or T: 0191 269 7810

GEORGIAN BAR TAPE

FoamLINK 1103H+ / FoamLINK 1603H+


Permanent indoor
and outdoor use.
Modified acrylic
adhesive system.

Bespoke roll
widths available
to suit your
Georgian
Bar size

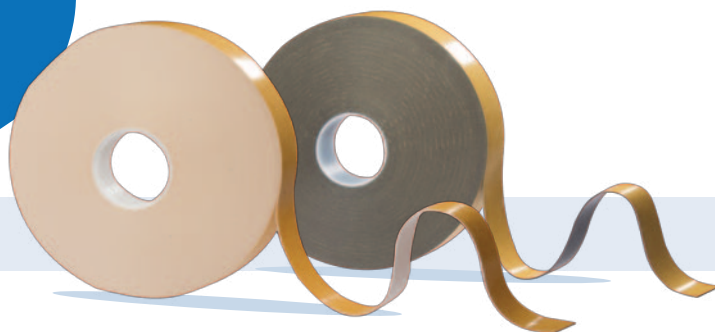

FoamLINK 1103H+ (white + black)

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|-----------------|
| GUKIT1103 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm | 50m | White and Black |

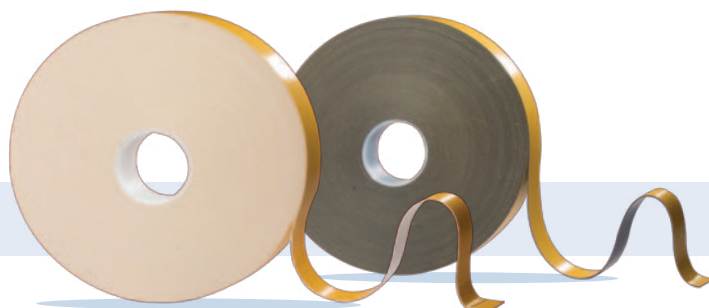


FoamLINK 1603H+ (white + black)

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|-----------------|
| GUKIT1603 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.6mm | 46m | White and Black |


Permanent indoor
and outdoor use.
Modified acrylic
adhesive system.

Bespoke roll
widths available
to suit your
Georgian Bar size

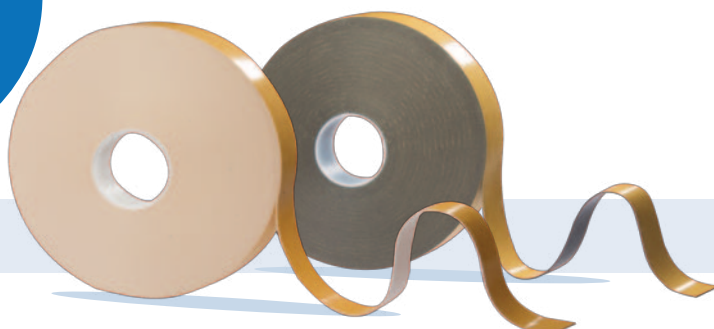

331

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|----------|---|------------|------------------|-----------------|
| GUKIT331 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm | 50m | White and Black |

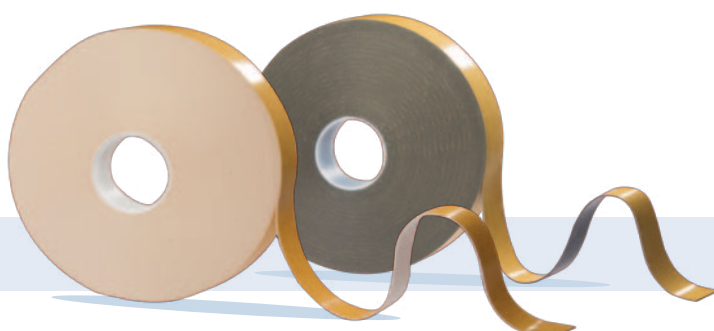

3316

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|---|------------|------------------|-----------------|
| GUKIT3316 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.6mm | 46m | White and Black |




GEORGIAN BAR TAPE

1222, 1223 and 1224

1222

High
Performance
Georgian
Bar Tape


Bespoke roll
widths available
to suit your
Georgian
Bar size

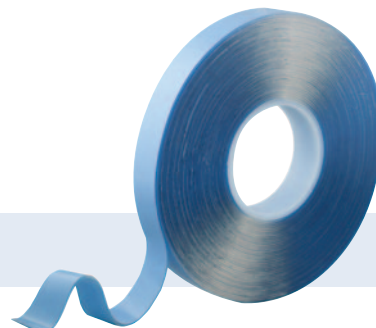

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT1222 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm | 25m | Clear |

1223


High
Performance
Georgian
Bar Tape

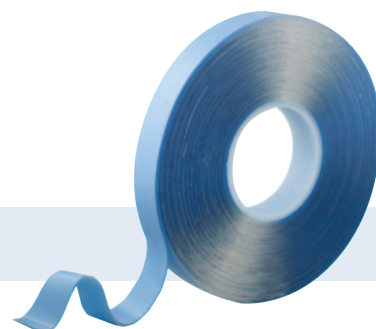

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT1223 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.5mm | 16.5m | Clear |

1224

High
Performance
Georgian
Bar Tape

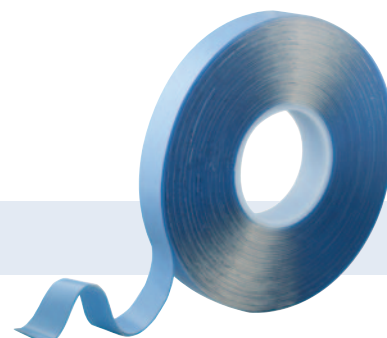

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT1224 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 2mm | 16.5m | Clear |


GEORGIAN BAR TAPE

1226 / 1228

1226

High
Performance
Georgian
Bar Tape


Bespoke roll
widths available
to suit your
Georgian
Bar size

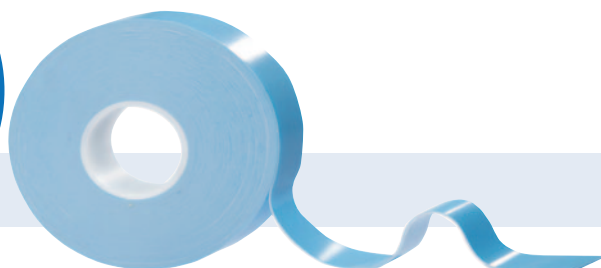

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT1226 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.1mm | 33m | White |

1228

High
Performance
Georgian
Bar Tape

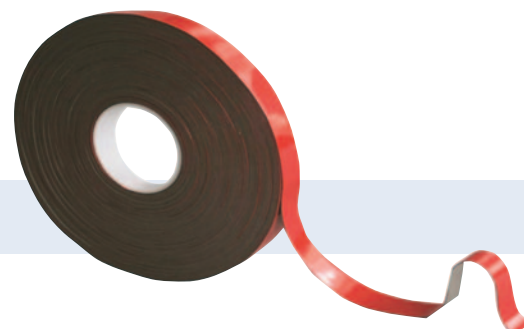

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT1228 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm | 33m | Black |



Glazing Tape



Our FoamLINK Range is our high performance Glazing Tape, a double coated, closed cell PE foam tape in black or white and with a acrylic adhesive system.

Available in 3 thickness (1mm, 1.6mm and 3mm) to suit your tape rebate. The tapes are ideal for Aluminium, UPVC or Timber window production, as they are bonding difficult and dissimilar surfaces including metals, wood, ceramics, plastics and even painted and powder coated finishes.

The PE foam construction provides excellent conformability and is ideal for rough, uneven and unstructured surfaces. In addition the foam offers excellent sealing and vibration absorption, ensuring that bonded joints remain permanently secure even in difficult and exacting applications.

Our FoamLINK Range;

FoamLINK 1103H+ – 1mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper release liner

FoamLINK 1603H+ – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with a paper or filmic release liner

FoamLINK 3003H+ – 3mm thick, PE Foam with a Modified Acrylic Adhesive, Black with a paper or filmic release liner

Why use FoamLINK Range:


- Specified for Aluminium, UPVC and Timber Glazing
- It has a fantastic initial tack
- Acrylic adhesive coated onto a closed cell, PE foam.
- Easy to remove paper or filmic release liner
- High shear, high peel, highly cohesive mass
- Excellent resistance to stress and vibration, forces which are experienced within the window application.
- Resists UV exposure and withstands household cleaners



GLAZING TAPE


1103H+ / 1603H+ / 3003H+

1103H+

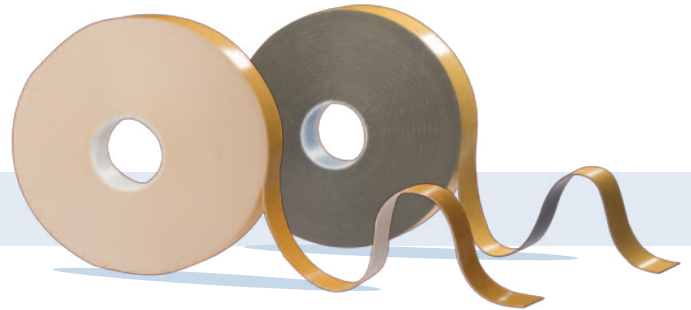


| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|-----------------|
| GUKIT1103 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm | 50m | White and Black |

1603H+

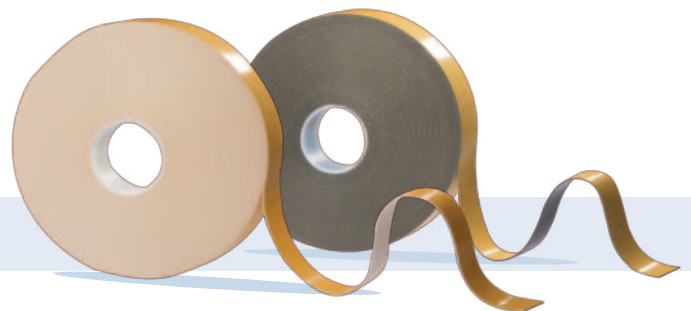

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|-----------------|
| GUKIT1603 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.6mm | 46m | White and Black |

3003H+

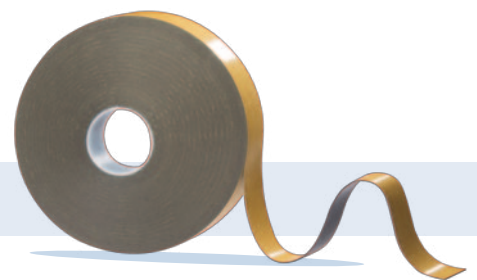

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------|
| GUKIT3003 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 3mm | 26m | Black |

SECURITY GLAZING TAPE

Security Glazing Tape

We offer our 33 Range as our Closed Cell PVC Foam Tape, Security Glazing Tapes.

Available in 1mm, 2mm, 3mm, 4mm, 5mm, 6mm, 7mm and 8mm thick.

The security glazing tapes we offer have an extremely high initial tack and an extremely durable PVC foam to enable compression when in application.

Benefits of using our Security Glazing Tape:


- High performance Closed Cell PVC Foam
- High initial tack
- Mass range of thickness (1mm upto 10mm)
- Bespoke widths available (10mm and 12mm from stock)
- Black or White colours available



SECURITY GLAZING TAPE

33 Range

33 Range

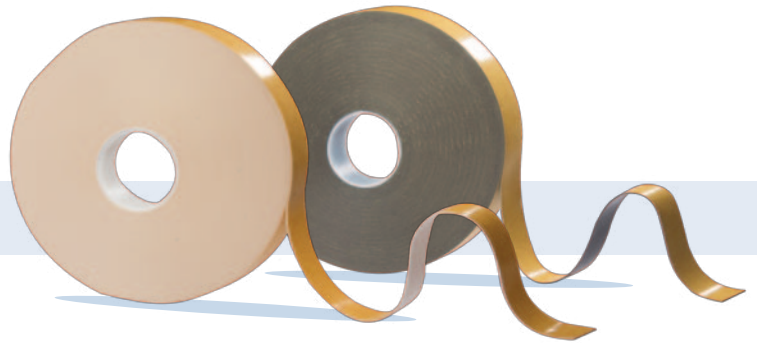

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|---------|--|-------------------------------|------------------------------|---------------|
| GUKIT33 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm, 2mm, 3mm, 4mm, 5mm, 6mm, | 50m, 25m, 20m, 12m, 10m, 20m | White & Black |



Why use our 33 range:

- Buy direct from the manufacturer
- No minimum order quantity
- Lead times of 2-3 days
- Extremely high tack solvent acrylic adhesive system
- Durable and dense closed cell PVC Foam

Trim Tape

We offer our 331 for the trim application, this double sided superior closed cell PE foam has a ultra high performance modified acrylic adhesive system.

The 331 PE foam construction, provides excellent conformability and is therefore ideal for rough, uneven and structured surfaces. In addition the foam offers excellent sealing damping and vibration absorption capabilities, ensuring that bonded joints remain permanently secure, even in critical and exacting applications.

331 has good initial tack, combined with its superior bonding characteristics, enabling easy assembly and positioning. This product is therefore ideal for all permanent fixing and mounting applications of component parts, even for outdoor use.

**Permanent -
Indoor &
outdoor use.
Modified acrylic
adhesive system.**




Why use 331:

- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Modified Acrylic adhesive coated onto a PE foam
- Temperature resistance of -40°C to +70°C
- Easy to remove Paper release liner
- High shear, high peel, high cohesive mass.

Best selling trim tape
 Fantastic initial tack
 9mm and 10mm wide
 stock held
 Competitive pricing

331

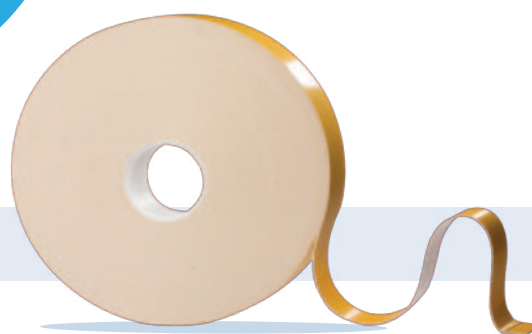

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|----------|----------------------------|------------|------------------|---------------|
| GUKIT331 | 8mm, 9mm, 10mm, 12mm, 15mm | 1mm | 50m | White & Black |



Why use the 331:

- 1mm thick PE Foam
- 9mm and 10mm wide held in stock
- White or Black (White is our best seller)
- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere to plastics. So the perfect trim tape.
- It has a fantastic initial tack.
- Competitive pricing

SINGLE SIDED FOAM TAPE

Single Sided Foam Tape

Market leading range of Single Sided Foam Tape

We offer a range of Single Sided Foam Tape for the vast gap filler or cushioning application requirements.

5000 Range:

PVC Foam, Self-Wound with an acrylic adhesive

- Medium Density PVC
- Thickness available 1.5mm, 3mm, 4.5mm, 6mm, 8mm
- Any width from 6mm up-to 1000mm, in Black with a Acrylic adhesive system
- No MOQ is required on the 5000 Range
- lead time of 2-3 days

33SSPVC:

Our 33SSPVC is a single sided PVC foam tape with a high tack acrylic adhesive. Each roll is boarded and shrink wrapped to ensure stability through transit and storage.

- Thickness of 1mm, 2mm, 3mm, 4mm, 5mm, 6mm
- Any width from 6mm up to 1250mm wide
- Black or White
- No MOQ involved
- Competitive pricing
- Quick and effective lead times

33SSPE:

Our 33SSPE is a single sided PE foam tape with a high tack acrylic adhesive. Each roll is boarded and shrink wrapped to ensure stability through transit and storage.

- Thickness of 1mm, 2mm, 3mm, 4mm, 5mm, 6mm
- Any width from 6mm up to 1250mm wide
- Black or White
- No MOQ involved
- Competitive pricing
- Quick and effective lead times

SINGLE SIDED FOAM TAPE

78103 / 76103 / 5000 range

33SSPE

Our 33SSPE is a single sided PE foam tape with a high tack acrylic adhesive. Each roll is boarded and shrink wrapped to ensure stability through transit and storage.

| Code: | Widths: | Thickness: | Colour: | MOQ |
|--------|--------------------------------------|------------------------------|----------------|-----------------|
| 33SSPE | Any width from 6mm up to 1250mm wide | 1mm, 2mm, 3mm, 4mm, 5mm, 6mm | Black or White | No MOQ involved |



33SSPVC

Our 33SSPVC is a single sided PVC foam tape with a high tack acrylic adhesive. Each roll is boarded and shrink wrapped to ensure stability through transit and storage.

| Code: | Widths: | Thickness: | Colour: | MOQ |
|---------|--------------------------------------|------------------------------|----------------|-----------------|
| 33SSPVC | Any width from 6mm up to 1250mm wide | 1mm, 2mm, 3mm, 4mm, 5mm, 6mm | Black or White | No MOQ involved |



5000 range

The 5000 Range is a medium density closed cell PVC foam sealant. We can convert to any bespoke width between 6mm upto a logs width of 1000mm wide. No MOQ (minimum order quantity) on our 5000 Range, you can take any roll quantity to suit.

| Code: | Widths: | Thickness: | Colour: | MOQ |
|-----------|--------------------------------|------------------------------|---------|--------|
| GUKIT5000 | Any width from 4mm upto 1250mm | 1.5mm, 3mm, 4.5mm, 6mm, 8mm, | Black | No MOQ |



Expanding Foam Tape

Our 8001 Range Expanding Foam Tape is ideal for joint sealing and gap filling in a range of applications within the Glass, Glazing, Roofing & Construction market, and is BBA Approved.

The 8001 Range will provide a seal against the most demanding environmental conditions from "Air / Dust" to "Water / Driving Rain" at 600 Pa. It is a pre-compressed polyurethane foam. Manufactured to ISO 9001 and is approved for DIN 18542 and DIN 4102.

Why use our BBA Approved 8001 Expanding Foam Tape:


- Best-selling Expanding Foam Tape in the industry.
- BBA Approved
- Provides weather sealing in demanding conditions.
- Seals against wind, dust and driving rain.
- Any width available from 10mm up to 500mm wide.
- Mass range of expansion sizes to suit your gap filling application.
- Black in colour but our 8001 is paintable.



EXPANDING FOAM TAPE

8001 Range

8001 Range



| Code: | Size: | Width: | Thickness: | Provides a weather seal in gaps size's between | Fills Gap Size (not involving weather conditions) | Meterage |
|-----------|----------------|--------|------------|--|---|----------|
| GUKIT8001 | 10mm x 2-4mm | 10mm | 2-4mm | 2-4mm | 13mm | 10m |
| GUKIT8001 | 15mm x 2-4mm | 15mm | 2-4mm | 2-4mm | 13mm | 10m |
| GUK T8001 | 20mm x 2-4mm | 20mm | 2.4mm | 2.4mm | 13mm | 10m |
| GUKIT8001 | 10mm x 3-6mm | 10mm | 3-6mm | 3-6mm | 17mm | 8m |
| GUKIT8001 | 15mm 3-6mm | 15mm | 3-6mm | 3-6mm | 17mm | 8m |
| GUKIT8001 | 20mm 3-6mm | 20mm | 3-6mm | 3-6mm | 17mm | 8m |
| GUKIT8001 | 20mm x 4-10mm | 20mm | 4-10mm | 4-10mm | 30mm | 5.6m |
| GUKIT8001 | 30mm x 4-10mm | 30mm | 4-10mm | 4-10mm | 30mm | 5.6m |
| GUKIT8001 | 40mm x 4-10mm | 40mm | 4-10mm | 4-10mm | 30mm | 5.6m |
| GUKIT8001 | 20mm x 5-12mm | 20mm | 5-12mm | 5-12mm | 35mm | 4.3m |
| GUKIT8001 | 30mm x 5-12mm | 30mm | 5-12mm | 5-12mm | 35mm | 4.3m |
| GUKIT8001 | 40mm x 5-12mm | 40mm | 5-12mm | 5-12mm | 35mm | 4.3m |
| GUKIT8001 | 20mm x 7-16mm | 20mm | 7-16mm | 7-16mm | 44mm | 3.3m |
| GUKIT8001 | 30mm x 7-16mm | 30mm | 7-16mm | 7-16mm | 44mm | 3.3m |
| GUKIT8001 | 40mm x 7-16mm | 40mm | 7-16mm | 7-16mm | 44mm | 3.3m |
| GUKIT8001 | 30mm x 9-20mm | 30mm | 9-20mm | 9-20mm | 55mm | 2.6m |
| GUKIT8001 | 45mm x 9-20mm | 45mm | 9-20mm | 9-20mm | 55mm | 2.6m |
| GUKIT8001 | 60mm x 9-20mm | 60mm | 9-20mm | 9-20mm | 55mm | 2.6m |
| GUKIT8001 | 30mm x15-32mm | 30mm | 15-32mm | 15-32mm | 88mm | 4m |
| GUKIT8001 | 45mm x15-32mm | 45mm | 15-32mm | 15-32mm | 88mm | 4m |
| GUKIT8001 | 60mm x 15-32mm | 60mm | 15-32mm | 15-32mm | 88mm | 4m |
| GUKIT8001 | 40mm x 22-40mm | 40mm | 22-40mm | 22-40mm | 134mm | 2.7m |
| GUKIT8001 | 60mm x 22-40mm | 60mm | 22-40mm | 22-40mm | 134mm | 2.7m |
| GUKIT8001 | 80mm x 22-40mm | 80mm | 22-40mm | 22-40mm | 134mm | 2.7m |

Ceramic Glazing Tape

We offer our Ceramic Glazing Tape for use when glazing a wide variety of insulating and non-insulating fire resistant glass types into internal screens and doors manufactured from timber or steel.

Our advanced production techniques ensure a highly uniform structure enhanced by low thermal conductivity, good handling strength and a smooth surface. Our Ceramic paper products are manufactured from alkaline earth silicate (AES), with a low bio persistence wool, blended with specially selected organic binders to give flexible papers with exceptional characteristics

The Ceramic Glazing Tape has been tested by a number of window system producers, as an integral part of steel and timber glazed systems to BS476 and other equivalent national standards (DIN4102).

**Permanent
adhesive - Indoor
and outdoor use.**
High Temperature
stability (up to 1200
degrees C).

Why use our Ceramic Glazing Tape?

- High Temperature stability (up to 1200 degrees C)
- Good Handling strength
- Lightweight
- Excellent flexibility
- Easy to wrap, cut and shape

CERAMIC GLAZING TAPE

Ceramic Glazing Tape

**High
Temperature
stability**
(up to 1200
degrees C)


**Good Handling
strength
and excellent
flexibility**



Ceramic Glazing Tape

| Code: | Widths: | Thickness: | Colour: |
|----------|--|-------------------------------|---------------|
| GUKITCGT | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1mm, 2mm, 3mm, 4mm, 5mm & 6mm | White & Black |

UPVC Door Panel Bonding Tape

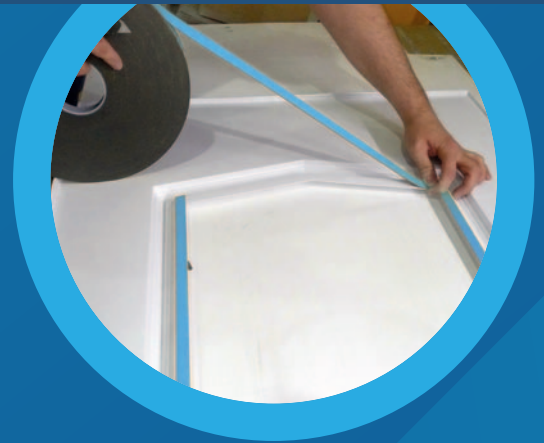

We offer our ProLINK 1500R and FoamLINK 1603H+ for the UPVC Door Panel application. We have supplied these tapes into the UPVC Door Panel manufacturers in the UK & Europe for over 28 years.

The ProLINK 1500R was specifically developed for this demanding application so the performance characteristics are tailored to bond to UPVC Polypropylene, Styrene and other hard to adhere plastics, due to overall high performance and extremely strong bond, the ProLINK 1500R eradicates the need for a silicone cap and will provide a 100% waterproof bond.

Our FoamLINK 1603H+ is a high performance PE foam tape with a specific modified acrylic adhesive system allowing it to provide a ultimate bond to UPVC Polypropylene, Styrene and other hard to adhere plastics. We still recommend to silicone cap when using the FoamLINK 1603H+ but provides high levels of initial tack making glazing a easy and quicker option than silicone's or sealants.

UPVC Door Panel Tape range:

- **ProLINK 1500R** – High performance, clear, 1.5mm thick, Pure Acrylic Tape, blue filmic release line
- **FoamLINK 1603H+** – 1.6mm thick, PE Foam with a Modified Acrylic Adhesive, in White or Black with an amber paper or filmic release liner

Why use ProLINK 1500R:

- 100% waterproof bond
- Gives a tremendous clean & clear sight line
- No need to silicone cap the panels
- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Temperature resistance of -40°C to 260°C
- Clean easy instant bond
- Quicker production time, as you don't need to wait for sealant to dry

Why use FoamLINK 1603H+:

- Specifically developed to stick to UPVC, Polypropylene, Styrene and other hard to adhere plastics
- It has a fantastic initial tack
- Modified acrylic adhesive system coated onto a PE foam
- Temperature resistance of -40°C to 90°C
- Easy to remove paper or filmic release liner
- Still need to Silicone Cap when using the FoamLINK 1603H+
- Available in Black or White with either a amber paper (hand tear able) or blue filmic (durable) release liner

UPVC DOOR PANEL BONDING TAPE


FoamLINK 1603H+ / ProLINK 1500R

FoamLINK 1603H+ (white and black)

Permanent adhesive - Indoor & outdoor use.


Modified acrylic adhesive. Temperature range: -40°C to +70°C.

Tremendous high quality foam tape with modified acrylic adhesive. Will bond metals, wood, ceramics, glass, paper and board and is ideally suited to bond hard to adhere to plastics. Very high initial tack combined with tremendous shear and peel qualities.

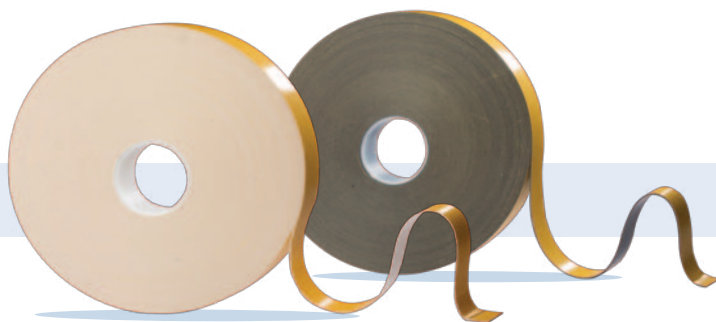

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|--|------------|------------------|---------------|
| GUKIT1603 | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.6mm | 46m | White & Black |

ProLINK 1500R

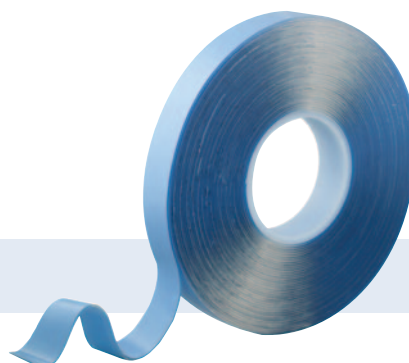

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|------------|--|------------|------------------|---------|
| GUKIT1500R | 10mm, 12mm, 15mm, 18mm, 20mm, 22mm, 24mm | 1.5mm | 16.5m | Clear |

**Permanent
indoor and
outdoor use**
(up to 1200
degrees C)

**Temperature
range:**
-40°C to +120°C
long term.



Composite Door Cassette Bonding Tape

We offer our ProLINK Range and 122 Range for the Composite Door Manufacturers in the UK & Europe, for glazing the cassette system for use within the composite door.

Our ProLINK Range and 122 Range are high performance, clear, pure acrylic adhesive system which has been tested and approved in the Nan-Ya & ODL TriSYS Cassette Systems by Composite Door Manufacturers to PAS 23/24 and SBD.

Pure Acrylic Range:

ProLINK 1000R – Ultra High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

ProLINK 1500R – Ultra High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System

1222 – High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

1223 – High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System

1224 – High performance, clear, 2mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

Why use our Pure Acrylic Range:

- 100% waterproof bond (no need to silicone)
- Approved to PAS 23/24 & SBD, so industry know
- Temperature resistance of -40°C to 260°
- Easy to remove / strong filmic release liner
- Strong initial bond along onto the channels
- Industry used for over 10 Years by leading manufacturers


COMPOSITE DOOR CASSETTE BONDING TAPE

ProLINK 1000R / ProLINK 1500R / 1222 / 1223 / 1224

ProLINK 1000R

Ultra High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System


| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|------------|-----------------------|------------|------------------|---------|
| GUKIT1000R | 8mm, 9mm, 10mm & 12mm | 1mm | 25m | Clear |



ProLINK 1500R

Ultra High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System


| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|------------|----------------------------|------------|------------------|---------|
| GUKIT1500R | 6mm, 8mm, 9mm, 10mm & 12mm | 1.5mm | 16.5m | Clear |



1222

High performance, clear, 1mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System


| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|-----------------------|------------|------------------|---------|
| GUKIT1222 | 8mm, 9mm, 10mm & 12mm | 1mm | 25m | Clear |



1223

High performance, clear, 1.5mm thick, Pure Acrylic Tape. 6mm wide is recommended for use on the Nan-Ya Cassette System


| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|-----------------------|------------|------------------|---------|
| GUKIT1223 | 8mm, 9mm, 10mm & 12mm | 1.5mm | 16.5m | Clear |



1224

High performance, clear, 2mm thick, Pure Acrylic Tape. 8mm & 9mm wide is recommended for use on the ODL TrySYS Cassette System

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-----------|-----------------------|------------|------------------|---------|
| GUKIT1224 | 8mm, 9mm, 10mm & 12mm | 2mm | 16.5m | Clear |



Composite Door Cassette Glazing

APPLICATION GUIDE

Please revert to this guide when using our tapes within the Nan-Ya and ODL Cassette System for your Composite Door Cassette Glazing.

1. Ensure that the operators are cleaning the cassette down with a suitable solvent before applying the tape (please contact us for details on our recommended cleaner), please note that if the cassette is not cleaned and has any surface dust or dirt then this will not help the performance of the tape.

2. When the operators are handling the Prolink, please ensure that the adhesive side of the tape is not touched at all when applying the tape to the cassette, educating the operators on this process will make a considerable difference.

3. Regarding storage of the tape, make sure that the tape is not left out on any production bench before, during or after application as this leaves the tape open to picking up dirt, this will again not help the performance of the tape.

4. We recommend that after the tape has been applied to the cassette, that the operator uses a roller (our GUKITROLLER, please contact us for further details on this product) and run it along the tape after it is applied this will make a massive difference to the adhesive bond and also make it a lot easier to release of the Blue HDPE filmic release liner, which will only help efficiency and speed for your production line.

5. Once the cassettes have been taped up, please ensure that the cassettes are left for a period of time to let the Prolink's adhesive wet out into the surface and create its ultimate bond.

6. On the Nan-Ya cassette system customers have two glazing options, **A** or **B**;
 - A. Overlapping the tape on the corners and leaving the overlap when glazing the cassette. Where the tape has been overlapped apply a spot of Alansons 1101 clear adhesive behind the overlap.
 - B. Cutting the tape back and butt joint it on the corners. If there is a slight gap especially at the bottom of the cassette, apply a spot of Alanson's 1101 clear adhesive.

7. On the ODL cassette system we have a number of customer who are overlapping the tape at the corners and leaving the overlap when glazing the cassette, due to the ODL cassette being a screw system the pressure generated from this gives sufficient compression on the tape to ensure that there is no gap for any water ingress.

8. On any cassette system when taping, always apply the Prolink to the horizontal channels first, ensuring all vertical joints are butted together tight gap free to create a waterproof seal.

9. Once the door and cassette area has been fully cleaned and glazing is complete, apply a fine bead of Alanson's 1101 clear sealant to the bottom of the external cassette meeting the glass and 10mm up vertically at the corner.


COMPOSITE DOOR SLAB TAPE

Aluminium Vapour Tape

Aluminium Vapour Tape

An aluminium interleaved tape with a Polyester over-laminate film with a solvent adhesive.

This tape is used for sealing exposed edges of timber/composite doors to protect from water ingress and vapour. It can also be used for sealing other materials to create a barrier where water vapour can be an issue.

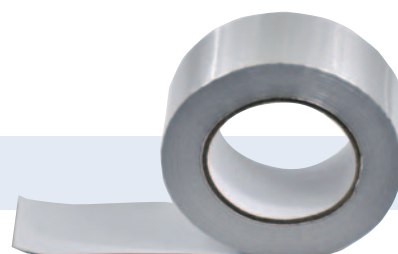


Key Features

- Excellent vapour resistance
- Excellent abrasion resistance
- High tack
- Multiple applications

Technical Specification

- Aluminium Foil thickness: 0.022mm (22 micron)
- Polyester Film thickness: 0.023mm
- Adhesive: Solvent Acrylic
- Overall thickness: 0.105mm

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|---------|--|------------|------------------|---------|
| GUKITAT | 20mm, 55mm & 60mm (5mm fingerlift liner) | 0.105mm | 50m | Silver |

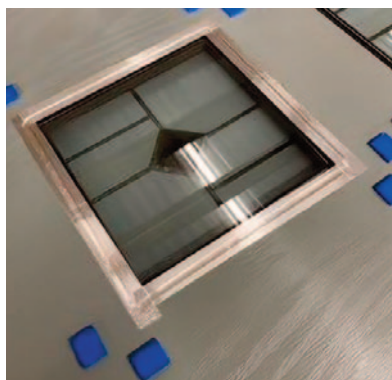

LOW TACK PROTECTION TAPES

Low Tack Protection Tapes

We offer a vast range of Low Tack Protection Tapes to suit various surfaces and applications. Available in different thicknesses and colours, our tapes are tested and approved for temporary protection, ensuring they can be removed without leaving any residue on the applied surface.

0803CL Range:

Our 0803CL is our most popular low tack production tape for the glass & glazing market. Available in 80 micron or 100 micron thickness in white on black, black or a bespoke printed colour.

Ideal for temporary protection of UPVC and Aluminium Window and Door profiles.

782:

Our 782 Glass Protection Film is designed to protect Glass, Windows, Window Frames and Glazed Glass Panels from dust, dirt, plaster, paint and damages on site and throughout production and installation.

The special, formulated adhesive, allows 782 Glass Protection Film to stick and bond to the Glass or Window, but crucially to be removed after a period and leave no adhesive residue. Can be used indoors and outdoors.

1010:

Our 1010 Range are Carpet 1010C and Hard Floor 1010H Protection Tapes.

Our Carpet Protection and Hard Floor Protection Tapes are designed to protect carpets and hard flooring from mass footfall, spillages, dirt and dust.

The special, formulated adhesive, allows the 1010C and 1010H Protection Tape to stick and bond to the carpet flooring and hard floor (such as wood, tile, stone, ceramic and most vinyl surfaces) flooring, but crucially to be removed after a period and leave no adhesive residue.


*Not to be used on Wool Carpet Flooring or Wool Carpet Stairs

1010FR:

Our 1010FR Flame Retardant Carpet Protection Film is designed to protect carpets from mass footfall, spillages, dirt and dust.

Low Tack Protection Film Dispenser:


Our Low Tack Protection Film Dispensers is designed to increase efficiency in the application of our Protection Films.

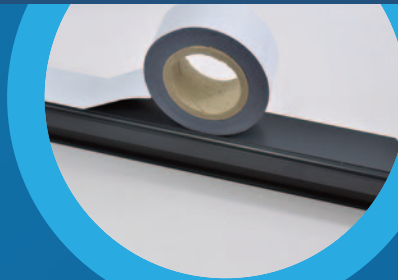

LOW TACK PROTECTION TAPE

0803CL

0803CL

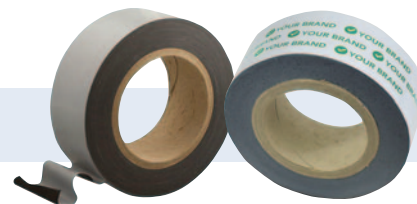

Our 0803CL is our most popular low tack production tape for the glass & glazing market.

Available in 80 micron or 100-micron thickness in the industry know white on black, black or bespoke printed colour.

Ideal for temporary protection of UPVC and Aluminium Window and Door profiles.

Our 0803CL- Application Guide is available to enhance the speed and efficiency of our 0803CL Low Tack protection Tapes.

| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-------------------|---|------------|------------------|-------------------------------------|
| 0803CL-80 | Any width from 6mm up to a log width of | 80 micron | 100 | White on Black |
| 0803CL-100 | Any width from 6mm up to a log width of | 100 Micron | 100 | White on Black |
| 0803CL-100B | Any width from 6mm up to a log width of | 100 Micron | 100 | Black |
| 0803CL-Printed | Any width from 6mm up to a log width of | 80 or 100 | 100 | Bespoke print on the White on Black |
| 0803CL Applicator | Fits upto 50mm width | 80 or 100 | 100 suitable | Black |

Why use the 0803CL:

- Any widths from 10mm up to 1500mm wide available. We can bespoke convert to any width to suit your profile width or application. Popular widths held in stock such as 25mm, 38mm, 50mm and 75mm and logs at 1500mm.
- Thickness 80 Micron (0.08mm) or 100 Micron (0.10mm)
- Colour: White on Black, Black or a Bespoke Print
- Type of adhesive natural rubber (solvent based)
- Type of film LDPE, three layer co-extruded, UV stabilised
- Outdoor and indoor protection for the following surfaces with low gloss (Stainless Steel (ground), Aluminium (ground, matt anodised), PVC, PVDF, Polyester, Acrylic lacquers and plastics, Ceramics, marble. However this film is not suitable for copper and brass.)
- Outdoor exposure Maximum 6 months.



LOW TACK PROTECTION TAPE

782

782

Our 782 Glass Protection Film is designed to protect Glass, Windows, Window Frames and Glazed Glass Panels from dust, dirt, plaster, paint and damages on site and throughout production and installation.

The special, formulated adhesive, allows 782 Glass Protection Film to stick and bond to the Glass or Window, but crucially to be removed after a period and leave no adhesive residue. Can be used indoors and outdoors.



| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|-------|--|------------|----------------------------|---------------|
| 782 | 50mm, 500mm, 600mm, 1200mm (Any width from 6mm up to a log width of 1500mm available) | 40 Micron | 50m, 100m, 150m or 200m | Clear or Blue |

Why use the 782:

- Specifically designed for temporary protection of Glass & Windows. 600mm wide a stocked line, however any bespoke widths from 10mm up to 1500mm wide available.
- Colour stocked of Blue or Clear
- Can be removed after a period and leave no adhesive residue.
- Thickness of 40 Micron (0.04mm)
- UV resistant.
- Easy to handle rolls. 50m, 100m, 150m or 200 meter rolls available



LOW TACK PROTECTION TAPE

1010

1010

Our 1010 Range are Carpet 1010C and Hard Floor 1010H Protection Tapes.

Our Carpet Protection and Hard Floor Protection Tapes are designed to protect carpets and hard flooring from mass footfall, spillages, dirt and dust.

The special, formulated adhesive, allows the 1010C and 1010H Protection Tape to stick and bond to the carpet flooring and hard floor (such as wood, tile, stone, ceramic and most vinyl surfaces) flooring, but crucially to be removed after a period and leave no adhesive residue.

*Not to be used on Wool Carpet Flooring or Wool Carpet Stairs



| Code: | Widths: | Thickness: | Metres per roll: | Colour: |
|------------------|--|-----------------------|----------------------------|---------|
| 1010C Carpet | 50mm, 500mm, 600mm, 1200mm (Any width from 6mm up to a log width of 1500mm available) | 40, 55, 70, 90 Micron | 50m, 100m, 150m or 200m | Clear |
| 1010H Hard Floor | 50mm, 500mm, 600mm, 1200mm (Any width from 6mm up to a log width of 1500mm available) | 40, 55, 70, 90 Micron | 50m, 100m, 150m or 200m | Clear |

Why use the 1010:

- Specifically designed for temporary protection of Carpets 1010C and Hard Floor 1010H
- Can be removed after a period and leave no adhesive residue.
- The film is extremely durable, ensuring minimal risk of carpet exposure.
- Thickness of 40 Micron, 55 Micron, 70 Micron and 90 Micron
- Various width and meterage roll options are available to suit demand.
- Can easily be swept, vacuumed and cleaned throughout the project to ensure a clean process.
- Easy to handle rolls.
- Can be used with our Low Tack Protection Film Dispenser to increase application efficiency.



LOW TACK PROTECTION TAPE

Flame Retardent Carpet Protection Film

Flame Retardent Carpet Protection Film

1010FR

Our 1010FR Flame Retardant Carpet Protection Film is designed to protect carpets from mass footfall, spillages, dirt and dust.

The special, formulated adhesive, allows the 1010FR Flame Retardant Carpet Protection Film to stick and bond to the carpet, but crucially to be removed after a period and leave no adhesive residue.

Due to the bonding performance to the carpet, the 1010FR Flame Retardant Carpet Protection Film can be swept, vacuumed and cleaned throughout the project, then removed after a period and leave no adhesive residue.

*Not to be used on Wool Carpet Flooring or Wool Carpet Stairs.

Why use the 1010FR:

- Flame Retardant
- Specifically designed for temporary protection of Carpets.
- Can be removed after a period and leave no adhesive residue.
- The film is extremely durable, ensuring minimal risk of carpe exposure.
- Different thickness films available to suit all requirements.
- Various width and meterage roll options available to suit demand.
- Can easily be swept, vacuumed and cleaned throughout the project to ensure a clean process.
- Easy to handle rolls.
- Can be used with our Low Tack Protection Film Dispenser to increase application efficiency.



| Code: | Width: | Thickness: | Metres per roll: | Colour: |
|--------|----------------------------|------------|-----------------------|---------|
| 1010FR | 50mm, 500mm, 600mm, 1250mm | 65 micron | 50m, 100m, 150m, 200m | White |

Low Tack Protection Film Dispensers

Low Tack Protection Film Dispenser

Our Low Tack Protection Film Dispensers is designed to increase efficiency in the application of our Protection Films.

Specifically designed for our range of Protection Films, our dispenser can be used with our Carpet, Hard Floor and Glass & Window Protection Films. Application and efficiency is key when on site, and our dispenser are easy to load, use and are extremely durable.

Why use the Dispenser:

- Easy to use and load.
- Dispenser can be used with our Carpet, Hard Floor and Glass & Window Protection Films.
- Increase application efficiency on site.
- Dispensers are extremely durable and long lasting.



| Code: | Width: | Thickness: | Metres per roll: | Colour: |
|----------|-------------------|---------------------|------------------|---------------------------------|
| GUKITLTD | Up to 1500mm wide | Up to any thickness | Up to 500m long | White (Bespoke upon request) |

Smart Systems Approved Tapes

Here at UK Industrial Tapes we have a range of tapes compatible with smart systems that are used very widely in the fabrication and glazing industry.



Evolution Window & Alitherm 47 Heritage Window

Glazing Tape

- FoamLINK 3003H+ (Black only)
- GUKIT300310326B / 10mm x 3mm x 26M

Glazing Tape

- FoamLINK 1603H+ (White or Black)
- GUKIT1603101646 / 10mm x 1.6mm x 46M

Georgian Bar Tape

- FoamLINK 1103H+ (White or Black)
- FGUKIT110310150 / 10mm x 1mm x 50m
For use on the UN3220 Georgian Bar
- FGUKIT110315150 / 15mm x 1mm x 50m
For use on the W20165 Georgian Bar
- FGUKIT110320150 / 20mm x 1mm x 50m
For use on the W20166 Georgian Bar

Security Glazing Tape

- 68130 (White or Black)
- GUKIT6813030420 / 30mm x 4mm x 20M

Low Tack Protection Tape

- 0803CL – Used on Standard profiles
(Not the Sensation or KL 14)
- 80 Micron thick White on Black Low Tack Protection Tape
- 1009 – Used for the Sensations Range only
(Not for use on the KL 14)
- 100 Micron thick Clear Low Tack Polythene Tape
- 8512 –Used for the Grey KL14ST System only
(Not for use on the Sensations Range)
- 88 micron thick Green Polyester Tape


For samples or a quotation of our range, please advise our Sales Account Executives, who shall arrange free samples for you to evaluate: sales@ukindustrialtapes.co.uk

SMART SYSTEMS APPROVED TAPES

Approved Tapes


Glazing Tape FoamLINK1603H+

| Code: | Colour: | Size: | Thickness | RPC: |
|----------------|----------------|--------------------|-----------|------|
| GPAL1603101646 | Black or White | 10mm x 1.6mm x 46m | 1.6mm | 30 |

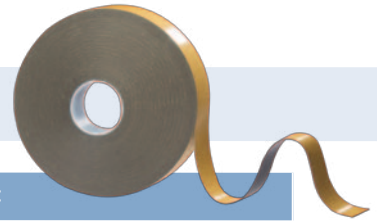


Glazing Tape FoamLINK 3003H+

| Code: | Colour: | Size: | Thickness | RPC: |
|----------------|---------|------------------|-----------|------|
| GPAL300310326B | Black | 10mm x 3mm x 26m | 3mm | 30 |

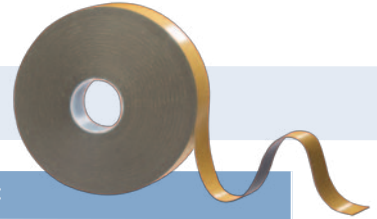


Georgian Bar Tape FoamLINK 1103H+

| Code: | Colour: | Size: | Thickness | RPC: |
|---------------|----------------|------------------|-----------|------|
| GPAL110315150 | Black or White | 15mm x 1mm x 50m | 1mm | 30 |
| GPAL110320150 | Black or White | 20mm x 1mm x 50m | 1mm | 15 |

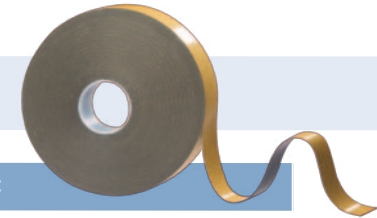

Low Tack Protection Tape 0803CL

| Code: | Colour: | Size: | Thickness | RPC: |
|-------------------|----------------|---------------|---------------------------------------|------|
| GPRO15001000803CL | Black or White | 1500mm x 100m | Can be slit to fit your specification | |




Sensations Range 1009

| Code: | Colour: | Size: | Thickness | RPC: |
|-----------------|---------|---------------|---------------------------------------|------|
| TRAW10091205100 | Clear | 1205mm x 100m | Can be slit to fit your specification | |



8512 for the Grey KL14ST System

| Code: | Colour: | Size: | Thickness | RPC: |
|-----------------|---------|---------------|---------------------------------------|------|
| GUKIT8512800100 | Green | 1200mm x 100m | Can be slit to fit your specification | |



122 RANGE - HIGH PERFORMANCE

High Performance Bonding Tapes

The 122 Range pure acrylic tapes are ultra high performance tapes, made up of both transparent bonding films and foamed acrylic adhesives.

All manufactured using a cutting edge, 100% acrylic mass technology.

With a special composition giving excellent all round bonding properties and unique characteristics that allow for very high performance in many demanding application.



122 Range (Pure Acrylic Tape) :

- 1220 – High Performance, 0.25mm thick, Clear Pure Acrylic Tape with a white paper release liner
- 1221 – High Performance, 0.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner
- 1222 – High Performance, 1mm thick, Clear Pure Acrylic Tape with a blue filmic release liner
- 1223 – High Performance, 1.5mm thick, Clear Pure Acrylic Tape with a blue filmic release liner
- 1224 – High Performance, 2mm thick, Clear Pure Acrylic Tape with a blue filmic release liner
- 1212 – High Performance, 1mm thick, Clear Pure Acrylic Tape with a red filmic release liner
- 1213 – High Performance, 1.2mm thick, Grey Foamed Acrylic Tape with a red filmic release liner
- 1226 – High Performance, 1.2mm thick, White Foamed Acrylic Tape with a red filmic release liner
- 1228 – High Performance, 1mm thick, Black Foamed Acrylic Tape with a red filmic release liner
- 1229 – High Performance, 2mm thick, Black Foamed Acrylic Tape with a red filmic release liner

Benefits of using 122 Range:

- Ultra high performance bonding tapes
- 100% waterproof bond on most application
- Easy remove release liner
- Excellent clarity (On the 1220, 1221, 1222, 1223, 1224 and 1212)
- Superb resistance to environmental factors, including UV, ageing etc.
- Excellent temperature resistance.

122 RANGE - HIGH PERFORMANCE BONDING

122 Range

1220

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|--------------|--------|--|
| 1220 | High performance | 0.25mm thick | Clear | Pure Acrylic Tape with a white paper release liner |

1221

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-------------|--------|--|
| 1221 | High performance | 0.5mm thick | Clear | Pure Acrylic Tape with a blue filmic release liner |

1222

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-----------|--------|--|
| 1222 | High performance | 1mm thick | Clear | Pure Acrylic Tape with a blue filmic release liner |

1223

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-------------|--------|--|
| 1223 | High performance | 1.5mm thick | Clear | Pure Acrylic Tape with a blue filmic release liner |

1224

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-----------|--------|--|
| 1224 | High performance | 2mm thick | Clear | Pure Acrylic Tape with a blue filmic release liner |

1212

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-----------|--------|---|
| 1212 | High performance | 1mm thick | Clear | Pure Acrylic Tape with a red filmic release liner |

1213

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-------------|--------|---|
| 1213 | High performance | 1.2mm thick | Grey | Foamed Acrylic Tape with a red filmic release liner |

1226

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-------------|--------|---|
| 1226 | High performance | 1.2mm thick | White | Foamed Acrylic Tape with a red filmic release liner |

1228

| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-----------|--------|---|
| 1228 | High performance | 1mm thick | Black | Foamed Acrylic Tape with a red filmic release liner |

1229


| Code: | Performance | Size: | Colour | Description: |
|-------|------------------|-----------|--------|---|
| 1229 | High performance | 2mm thick | Black | Foamed Acrylic Tape with a red filmic release liner |

Flashing Tape

We strive to offer the ultimate range of high-performance Flashing Tapes

Our waterproofing flashing tapes create the ultimate bond instantly with our high-tack bitumen and butyl adhesive which will then provide a permanent waterproof seal in application.

The flashing tape is laminated with either a lead effect material or an aluminium effect material, which is flexible to apply and is positioned into place by hand.

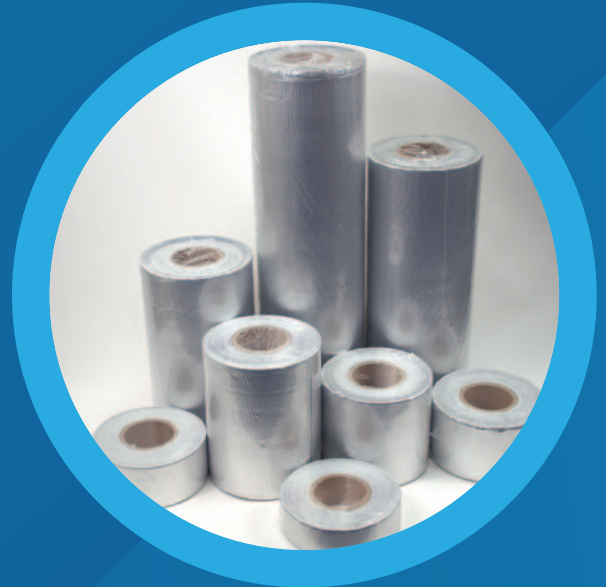

Application for our Flashing Tape:

- The flashing tape bonds to most surfaces including concrete, wood, slates, brick, metal, glass, plastic, roofing felt and roof tiles.
- It can be used to repair lead flashing, sealing roof ridges, flashing of skylights, sealing leaks in drain pipes and guttering, flashing bituminous felt, protecting pipe and tank insulations, repairing green houses and generally can be applied in a large number of construction and maintenance situations.

How to apply our Flashing Tape:

- Cut a section of the flashing tape to length, removing the release liner before placing the tape into position. Use a seam roller to ensure all edges and overlaps are firmly sealed. When overlapping allow a minimum of 25mm. Do not use in temperatures below 5°C and if below 15°C application will be easier by storing the flashing tape in a warm environment prior to use.
- All surfaces must be dry, clean and free from grease, dust, oil, loose materials and water. If used on concrete or other porous surfaces then a suitable primer should be used.





Flashing Tape

Our waterproofing flashing tapes create the ultimate bond instantly with our high-tack bitumen and butyl adhesive which will then provide a permanent waterproof seal in application.



| Code: | Reference: | Adhesive | Thickness: | Colour: | Widths: | Length: |
|-------|------------------|------------------|---------------|---------|--|------------------------|
| 1001 | Lead effect | Bitumen or Butyl | 1.2mm | Grey | 50mm, 75mm, 100mm, 150mm, 225mm, 300mm, 450mm and 600mm (other sizes available upon request) | 10m or 3m retail rolls |
| 1003 | Aluminium effect | Butyl | 1mm and 1.5mm | Silver | 50mm, 75mm, 100mm, 150mm, 225mm, 300mm, 450mm and 600mm (other sizes available upon request) | 10m or 3m retail rolls |

The flashing tape is laminated with either a lead or aluminium effect material



Airtightness Tapes



We are a leading supplier of high-performance Airtightness Tapes.

We strive to provide a range of high-performance air tightness tapes, membranes, silicones and adhesives to offer an ultimate airtight seal and bond for your building application.

Our range of Airtightness Tapes:

Airtightness Tapes range

(Range from UK Industrial Tapes Ltd)



SIGA Tapes range

(Authorised SIGA Reseller)



Tremco illbruck range

(Authorised Tremco illbruck Reseller)



sales@airtightnesstapes.co.uk

www.airtightnesstapes.co.uk

0191 269 7810


Airtightness Tapes is a brand of UK Industrial Tapes Ltd

Airtight with Airtightness Tapes



3100 Black Airtight Tape

Our 3100 single sided tape is a 75-micron PE film, coated with a 200 gsm clear modified acrylic adhesive system with scrim for dimensional stability. The PE film is UV resistant for 12 months.



| Code: | Width: | Specification: | Metres per roll: | Colour: |
|-----------|---|--|------------------|---------|
| GUKIT3100 | 50mm, 60mm (Any bespoke width from 6mm upto 1200mm available) | 75 Micron PE with a 200 gsm acrylic adhesive | 25m | Black |

3200 Double Sided Membrane


Our 3200 double-sided membrane Jointing Tape is extremely high tack, non-tear-able and double-sided, designed for jointing membranes in the construction industry.



| Code: | Width: | Specification: | Metres per roll: | Colour: |
|-----------|---|--|------------------|---------|
| GUKIT3200 | 25mm, 50mm, 85mm (Any bespoke width from 6mm upto 1200mm available) | PET Carrier with a synthetic rubber adhesive | 50m | Clear |

3300 High-performance Aluminium Tape


Our 3300 is a high-performance aluminum foil tape. It provides a moisture and puncture resistance when in application.



| Code: | Width: | Specification: | Metres per roll: | Colour: |
|-----------|--|--|------------------|---------|
| GUKIT3300 | 25mm, 50mm, 705mm (Any bespoke width from 6mm upto 1200mm available) | 22 micron aluminium tape with a polyester over laminating film with an acrylic adhesive. | 50m | Silver |

8001 BBA Approved Expanding Foam Tape

Our 8001 Expanding Foam Tape is ideal for joint sealing and gap filling in a range of applications within the Glass, Glazing, Roofing & Construction markets, now BBA Approved.



| Code: | Width: | Specification: | Colour: |
|-----------|---|--|---------|
| GUKIT8001 | Any bespoke width from 6mm upto 1200mm available) | Provides a weather seal in gap sizes between: 2-4mm, 3-6mm, 4-10mm, 5-12mm, 7-16mm, 9-20mm, 15-32mm, 22-40mm | Black |

AIRTIGHTNESS TAPES

AIRTIGHT WITH SIGA


Airtight with SIGA



UK Industrial Tapes Ltd (Airtightness Tapes) are an Authorised Siga Reseller.

SIGA offer a range of Single-sided and double-sided high-performance adhesive tapes to permanently seal building component joints and to create the airtight, wind and weathertight building envelope.

We can offer the full range of SIGA Tape for your requirement, from stock at market leading pricing.

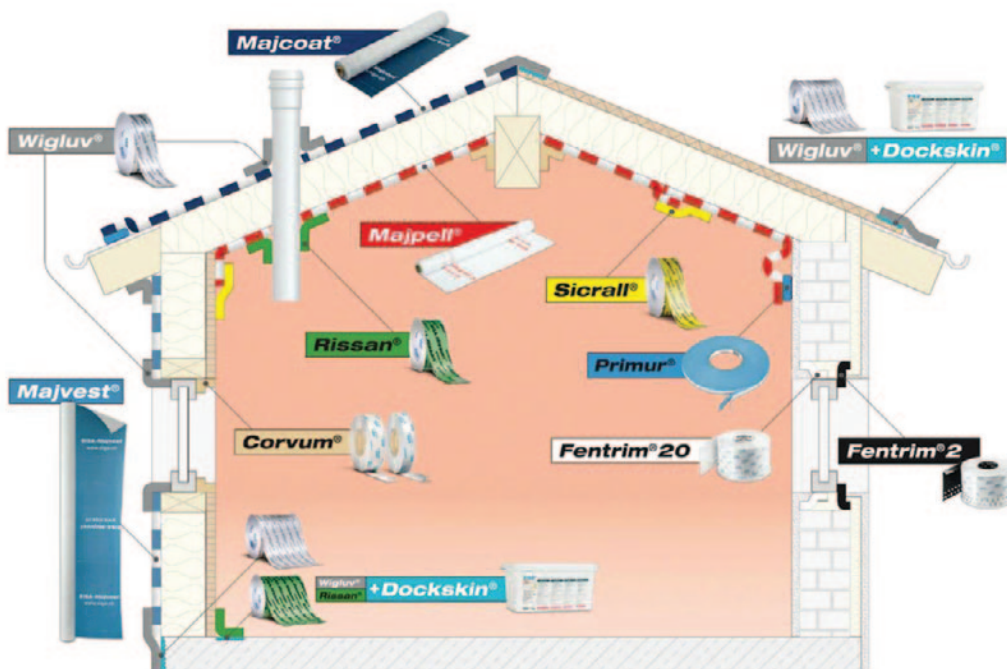

AIRTIGHTNESS TAPES

AIRTIGHT WITH SIGA

Working with SIGA Tapes to ensure your Roof, Timber or Solid Construction Projects create the airtight, wind and weathertight building envelope

Membranes:


Majrex®, Majpell®,
Majcoat®, Majvest®,
Wetguard®

Tapes:

Sicrall®, Rissan®,
Wigluv®, Fentrim®,
Corvum®, Twinet®,
Nail Sealing Tape,
Fentrim® Grommets.

Adhesives, Sealants and Primers:

Primur®, Dockskin®



AIRTIGHTNESS TAPES

AIRTIGHT WITH TREMCO ILLBRUCK

Airtight with Tremco illbruck



UK Industrial Tapes Ltd (Airtightness Tapes) are an Authorised Tremco illbruck Reseller.

Tremco illbruck provide you with high performance solutions for the sealing and bonding of windows, facades, interiors, and exteriors. From major construction projects to home renovations - illbruck are here to support you.

We can offer the full range of Tremco illbruck Tapes, Membranes and Silicones for your requirement, from stock at market leading pricing.



AIRTIGHTNESS TAPES


AIRTIGHT WITH TREMCO ILLBRUCK

Working with Tremco illbruck, the products and systems provide the sealing, bonding, and insulation for your project. From internal to external applications, the vast illbruck range contains high performance solutions for larger construction projects through to self builds and renovations.

UK Industrial Tapes Ltd (Airtightness Tapes) work with Tremco illbruck to deliver high performance products to the construction industry for over 30 years. You can rely on our tapes, membranes, sealants, and more for your next project.

Membranes:

illbruck membranes offer tested and durable solutions for various fields of application. Are you meeting the latest building regulations in terms of airtightness, thermal bridging, and vapour control?



Sealants & Adhesives:

illbruck has an extensive range of high performing sealants and adhesives - giving you the right performance and finish, whatever your application.

Impregnated Tapes:

illbruck impregnated foam tapes are top of the class! Explore our range of tapes, and tape it to the top.

Foams:

Our range of foams include multi-purpose foams, airseal foams, and expanding foams.

Packaging and Application Products

We offer a vast range of ancillary products for the Glass, Glazing and Construction packing and protecting applications.

Our products are ideal for packing and support for Windows, Doors and other products in a production or transport environment where it is vital to keep the finished product securely protected.

We produce our tapes in a range of widths and thickness and our glazing pads, pallet wrap and mini rolls and PTFE tape in a number of sizes and colours to suit your requirement.



We are always adding and developing our product range so that we can offer you a solution to your application.


For further information please contact our sales department.

0191 269 7810




High Quality Glass Transit Pads

High density foam glazing pads. Our glass transit pads feature a peel-able adhesive backing. We use a very strong high quality PVC foam in the production of our transit pads. The PVC foam is coated with a low tack adhesive system that will not leave an adhesive residue on the glass

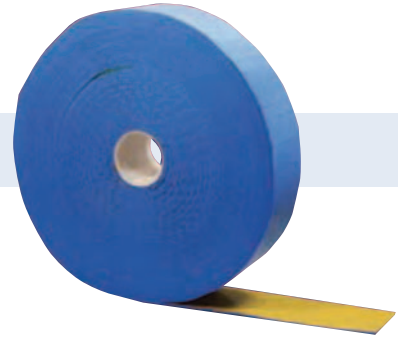

| Code: | Colour: | Size: | Thickness: | RPC: |
|---------------------|---------|---------------------|------------|----------------------|
| GUKIT2218510000BLUE | Blue | 22mm x 18mm x 4.2mm | 4.2mm | 10,000 pads per roll |
| GUKIT2218510000RED | Red | 22mm x 18mm x 4.2mm | 4.2mm | 10,000 pads per roll |

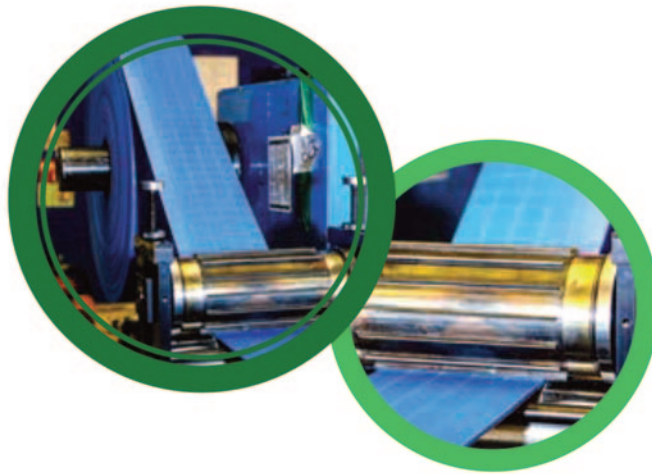

Coated with a low tack adhesive system that will not leave an adhesive residue on the glass.



Before use please ensure the surface is clean and dry by using an alcohol based Isopropanol cleaner

PACKAGING AND APPLICATION PRODUCTS

79P/2 Cloth Tape / PTFE Tape / Aluminium Tape

79P/2 Self Adhesive Waterproof Cloth Tape

We offer our 79P/2 Cloth tape in black and silver but other colours are available upon request. We coat our 79P/2 with a Solvent Rubber adhesive.




| Code: | Widths: | Metres per roll: | Colour: |
|------------|--|------------------|---------------------------------------|
| GUKIT79P/2 | 19mm, 24mm, 36mm, 38mm, 43mm, 48mm, 70mm, 75mm, 80mm | 50m | Black, Silver, White, Green, Blue Red |

Before use please ensure the surface is clean and dry by using an alcohol based Isopropanol cleaner


Aluminium Tape – 1012 Lined

Our 1012 is our 30 micron lined aluminium tape. It has a ultra aggressive acrylic adhesive system. Ideal for application such as HVAC sealing of joints, jointing of aluminium insulation boards, flexible air duct seams and connections. General purpose holding, patching, sealing and masking applications internal and external.

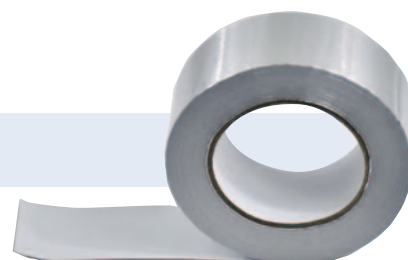

Approved to Class "O" approval. Tested in accordance with BS476: Part6:1989 +A1:2009 and BS476: Part7:1997.

| Code: | Colour: | Sizes: |
|-------|---------|--|
| 1012 | Silver | 50mm x 45.7m 24 rolls per box 75mm x 45.7m 16 rolls per box 100mm x 45.7m 12 rolls per box |

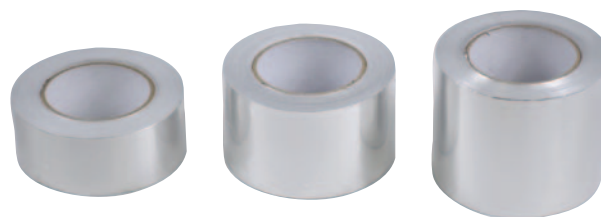

General Purpose Masking Tape

General Purpose Masking Tape is cream in colour with a clear adhesive, the adhesive is very aggressive and sticks very well to itself.



| Code: | Colour | Size | RPC |
|----------|--------|------------|-----|
| PMAN1950 | Cream | 19mm x 50m | 96 |
| PMAN2550 | Cream | 25mm x 50m | 72 |
| PMAN3850 | Cream | 38mm x 50m | 48 |
| PAMN5050 | Cream | 50mm x 50m | 36 |

TESA 4323 Masking Tape

Tesa 4323 Masking Tape is a good quality masking tape which tends to be thicker than most products currently used, it is cream in colour with a aggressive white adhesive system.




| Code: | Colour | Size | RPC |
|--------------|--------|------------|-----|
| FTES43231950 | Cream | 19mm x 50m | 96 |
| FTES43232550 | Cream | 25mm x 50m | 72 |
| FTES43233850 | Cream | 38mm x 50m | 48 |
| FTES43235050 | Cream | 50mm x 50m | 36 |

PACKAGING AND APPLICATION PRODUCTS

Pallet Wrap and Mini Rolls

Pallet Wrap


We offer Pallet Wrap from stock in the sizes as below.

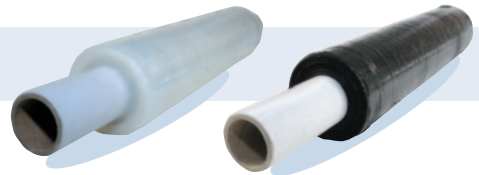

| Code | Colour | Size | Thickness | RPC |
|---------------------|--------|--------------|-----------|-----|
| PNOR40030012M | Clear | 400mm x 300m | 12 Micron | 6 |
| PNOR40030012MUBLACK | Black | 400mm x 300m | 12 Micron | 6 |

Mini Rolls

The clear film will only stick to itself not to anything else.
Use it for bundling, wrapping and protecting frames.
Great for attaching fixings to frames for transit to site.

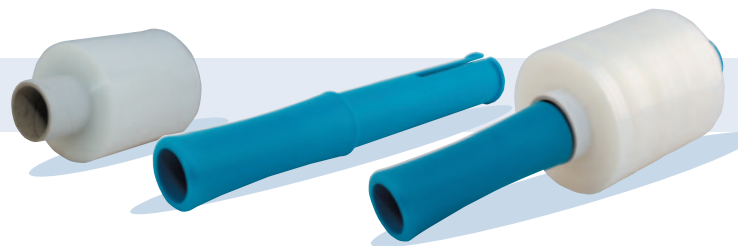


| Code | Colour | Size | Thickness | RPC |
|----------------|--------|---------------------|-----------|-----|
| F100DIS | Blue | Mini Roll Dispenser | - | - |
| GUKITMR1100150 | Clear | 100mm x 150m | 17 Micron | 40 |
| GUKITMR1100300 | Clear | 100mm x 300m | 17 Micron | 72 |

PACKAGING AND APPLICATION PRODUCTS

Packaging Tape and Printed Tape

Packaging Tape

Easy to use low noise tape with a high tack strong adhesive system.

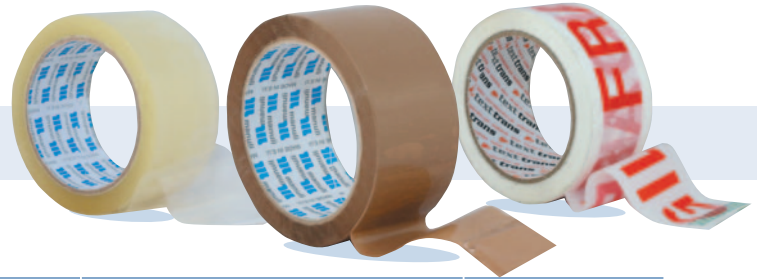

| Code | Colour | Size | RPC |
|--------------|---------|------------|-----|
| PMUR022566C | Clear | 25mm x 66m | 72 |
| PMURU35066C | Clear | 50mm x 66m | 36 |
| PMURU35066BU | Buff | 50mm x 66m | 36 |
| PCONFRAGILE | Printed | 50mm x 66m | 36 |

Tape Dispenser



| Code: | Description |
|----------------|---------------------|
| PADP50DISPD712 | Hand Dispenser 50mm |

Printed Tape

We can bespoke print any text or your company's branding onto the tape.



| Code: | Width: | Metres per roll: | Colour options: | RPC: | MOQ: |
|---------|--------|------------------|------------------|------|------|
| GUKITPT | 48mm | 66m | 1 upto 4 colours | 72 | 72 |

PACKAGING AND APPLICATION PRODUCTS

Adhesive Tape Pressure Roll / Disinfectant Cleaning Wipes

The correct initial preparation of the surface the adhesive tape is bonding too is key to ensure the tape can perform and create the ultimate bond over time. Therefore we supply a range of Cleaning and Preparation products to suit certain applications and substrates.

Our range;

- Isopropanol Cleaner Bottles (Surface Cleaner)
- Isopropanol Cleaner Sachets (Surface Cleaner)
- PrimeLINK RS (Surface Cleaner and Activator)
- Disinfectant Cleaning Wipes
- Adhesive Tape Roll (Pressure applicator)

Adhesive Tape Pressure Roll

Our UKIT Adhesive Tape Roller is an ideal product to use alongside our adhesive tapes once the tapes have been applied onto the surface / application, to then provide a even pressure force, allowing and assisting the tape to cure, flow and bond into the surface. As



| Code: | Colour: | Size: |
|-------------|---------|----------|
| GUKITROLLER | - | one size |

Disinfectant Cleaning Wipes

Our disinfectant cleaner wipes are perfect for use in a retail, industrial or office based environment. Water based, with 500 sheets (sheet size 190mm x 200mm) per tub.

We have our tubs held in stock with plain label. So if required, we can own brand the tubs for you with your company branding.



| Code: | Colour: | Sizes: |
|----------------------|--------------|--|
| GukitcleaningwipesWB | White sheets | 500 wipes per tub Wipe size is 190mm x 200mm 3 tubs per box. 20 boxes per pallet |

PACKAGING AND APPLICATION PRODUCTS

Isopropanol Cleaner Bottles + Sachets / PrimeLINK RS

Isopropanol Cleaner Bottles

We offer the UKIT Isopropanol Cleaner which will assist the preparation and cleaning of the surface before application.

50/50 mix of pure alcohol and water.

This is the ideal product to clean a surface before the application of any adhesive tape.



| Code: | Colour: | Size: |
|----------------|---------|-----------------|
| GUKITISOPROP1L | - | 1 litre bottles |

Isopropanol Cleaner Sachets

We offer the UKIT Isopropanol Cleaner Sachets which will assist the preparation and cleaning of the surface before application.



| Code: | Colour: | Size: |
|--------------------|---------|---------------------------------|
| GUKITISOPROPSACHET | - | 1 sheet per sealed paper sachet |

PrimeLINK RS

Our PrimeLINK RS is a Cleaner and Activator in one.

It is particularly easy to process because it is delivered ready to use. In all cases it must be applied to clean, dry surfaces.

Our PrimeLINK RS is applied with a brush or dried cloth in a thin, uniform coat. After applying our PrimeLINK RS it is recommended to wait 1 or more minutes to leave it time to dry, at room temperature, before applying an adhesive tape on the primer-prepared surface.



| Code: | Colour: | Size: |
|-----------------------|---------|----------------------|
| GUKITPRIMELINKRS250ML | - | 250ml and 500ml tins |

Our PrimeLINK RS is particularly recommended for use with the following surfaces:

- Aluminium
- Polished and unpolished stainless steel
- Painted, zinc plated and chrome plated steel
- Plastics: polyamide, polycarbonate, ABS etc.
- Powder coated substrates

Our PrimeLINK RS can be used in conjunction with:

- Urethane adhesives
- Epoxy adhesives
- Acrylic adhesive

HOW TO ORDER

How to order:

We pride ourselves on high product quality combined with excellent customer service to offer a reliable, consistent, and innovative supply. With our vast range of adhesive tapes and adhesive products, we strive to offer the ultimate solution for all your application requirements.

Our Sales Account Executives are on hand to offer market leading product knowledge to ensure you are supplied the correct tape for your application.

Contact us on the below:

T: 0191 269 7810

E: sales@ukindustrialtapes.co.uk

HQ: Brumwell House
Westway Industrial Estate
Throckley
Newcastle
Tyne & Wear
NE15 9EW

Keep up with UK Industrial Tapes
via our Social Media platforms:



Privacy Policy

Any information you provide us with is treated as confidential. Please take a moment to read our full privacy policy which can be found on our website www.ukindustrialtapes.co.uk

Returns Policy

All our goods are checked before dispatch and we hope you will find no cause for complaint. If you do, our full returns policy can be found on our website www.ukindustrialtapes.co.uk

Customer Feedback

UK Industrial Tapes is completely dedicated to your total satisfaction. If you have any suggestions or comments please get in touch. If you have reason to contact us about our service, then please email us at sales@ukindustrialtapes.co.uk

Delivery

In the UK stock items will be shipped within two days. We will notify you by email the despatch date on receipt of the order. Free carriage on orders over £100 in the UK. For orders below £100 there is a carriage charge of £10. Any changes or updates to this can be found on our website.

For delivery outside of the UK, charges are to be agreed depending on the volume of the order invoice.

VAT

For all orders dispatched to mainland UK VAT will be added.

Invoice

We can invoice in Sterling, Euros or Dollars to suit the customer.

Terms and Conditions of Sale

All sales are subject to our detailed Terms and Conditions of Sale, the current version of which is available either from our website www.ukindustrialtapes.co.uk, or from the address below. Please note that the Terms and Conditions may be subject to change from time to time. By placing an order to purchase any of the items listed in this catalogue you will be accepting that our Terms and Conditions of Sale apply to that order. If you do not agree to our Terms and Conditions of Sale, please contact our sales team to discuss further.

Please note that the Terms and Conditions of Sale are subject to English law and that all disputes arising in connections with any sale will be subject to the jurisdiction of the courts of England and Wales.

If you have any questions about our Terms and Conditions of Sale or would like us to send you a copy, please contact us at:

UK Industrial Tapes Ltd. Brumwell House, Westway Industrial Estate, Throckley, Newcastle Upon Tyne, NE15 9EW, UK

sales@ukindustrialtapes.co.uk

0191 269 7810

www.ukindustrialtapes.co.uk

GLASS & GLAZING

HIGH PERFORMANCE ADHESIVE TAPES



UK Industrial Tapes Ltd

UK Industrial Tapes Ltd
Brumwell House
Westway Industrial Estate
Throckley
Newcastle Upon Tyne
NE15 9EW

sales@ukindustrialtapes.co.uk

0191 269 7810

www.ukindustrialtapes.co.uk